



# Elevator Ropes

**alps**   
wire rope corporation®

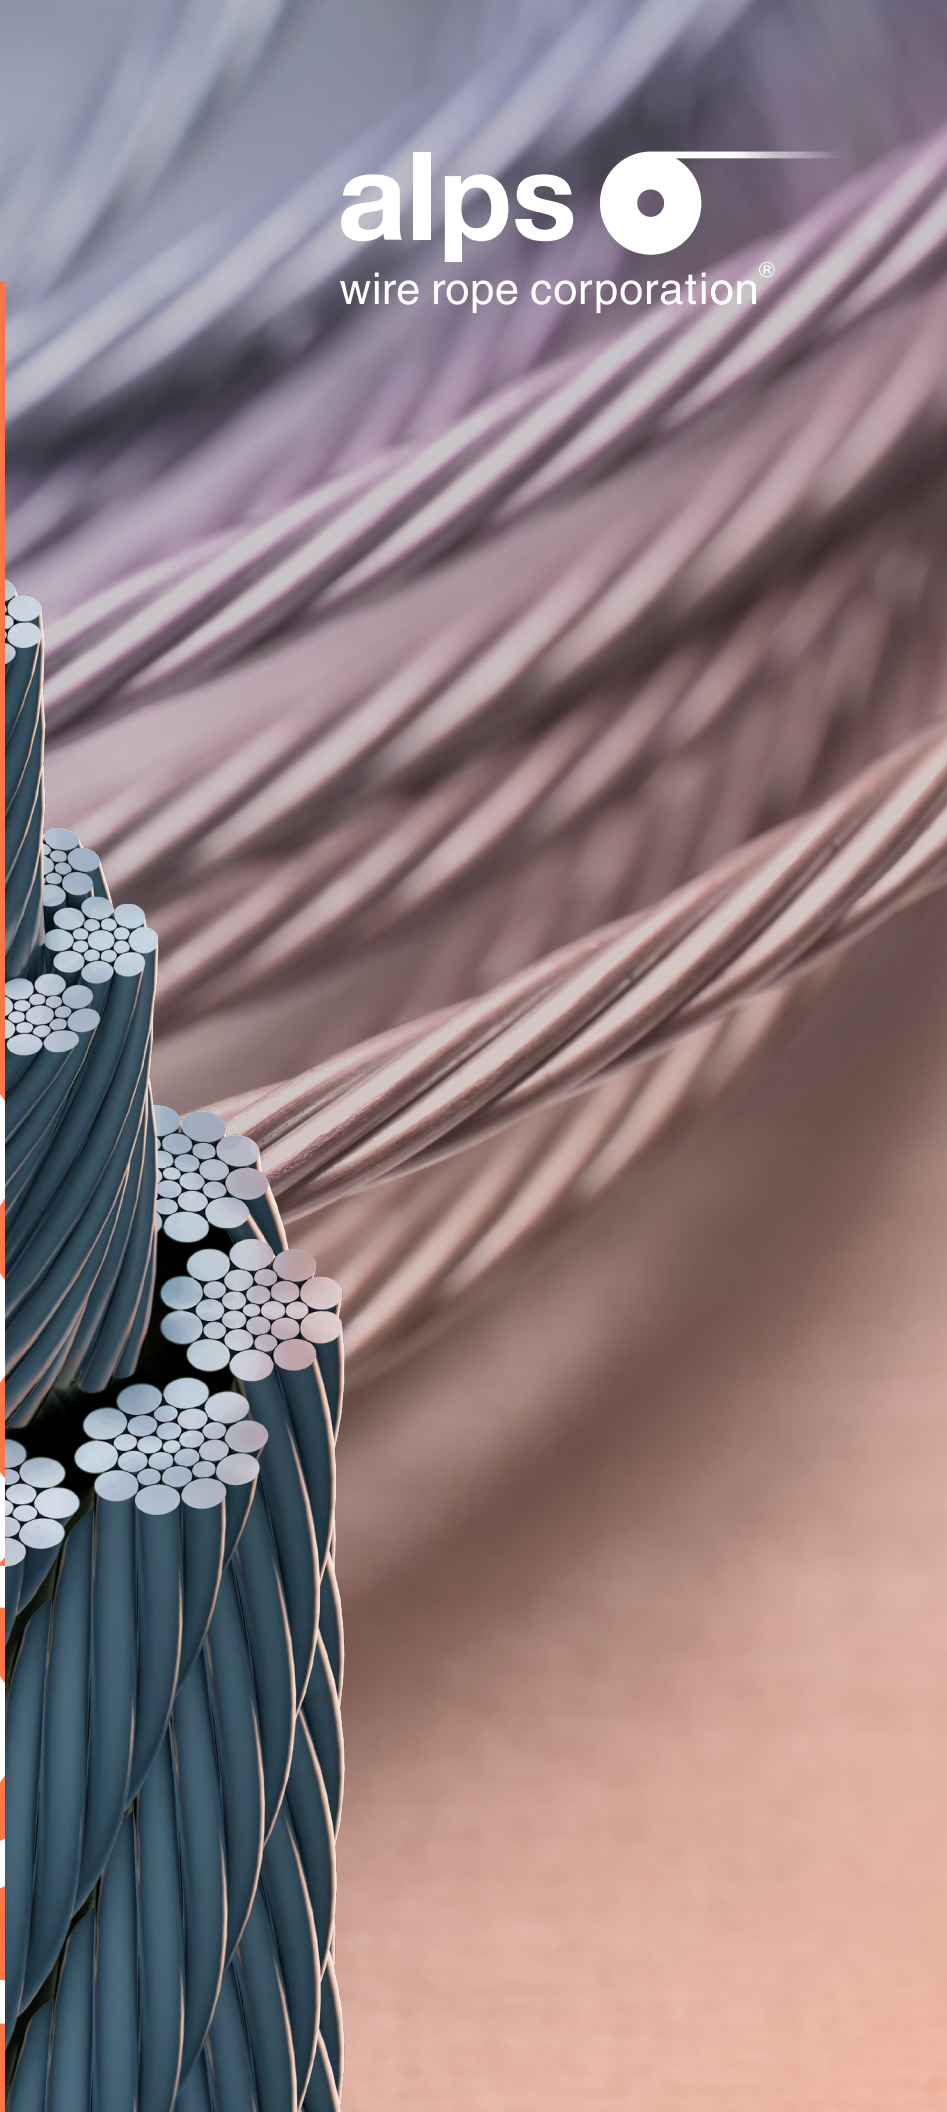

Contents

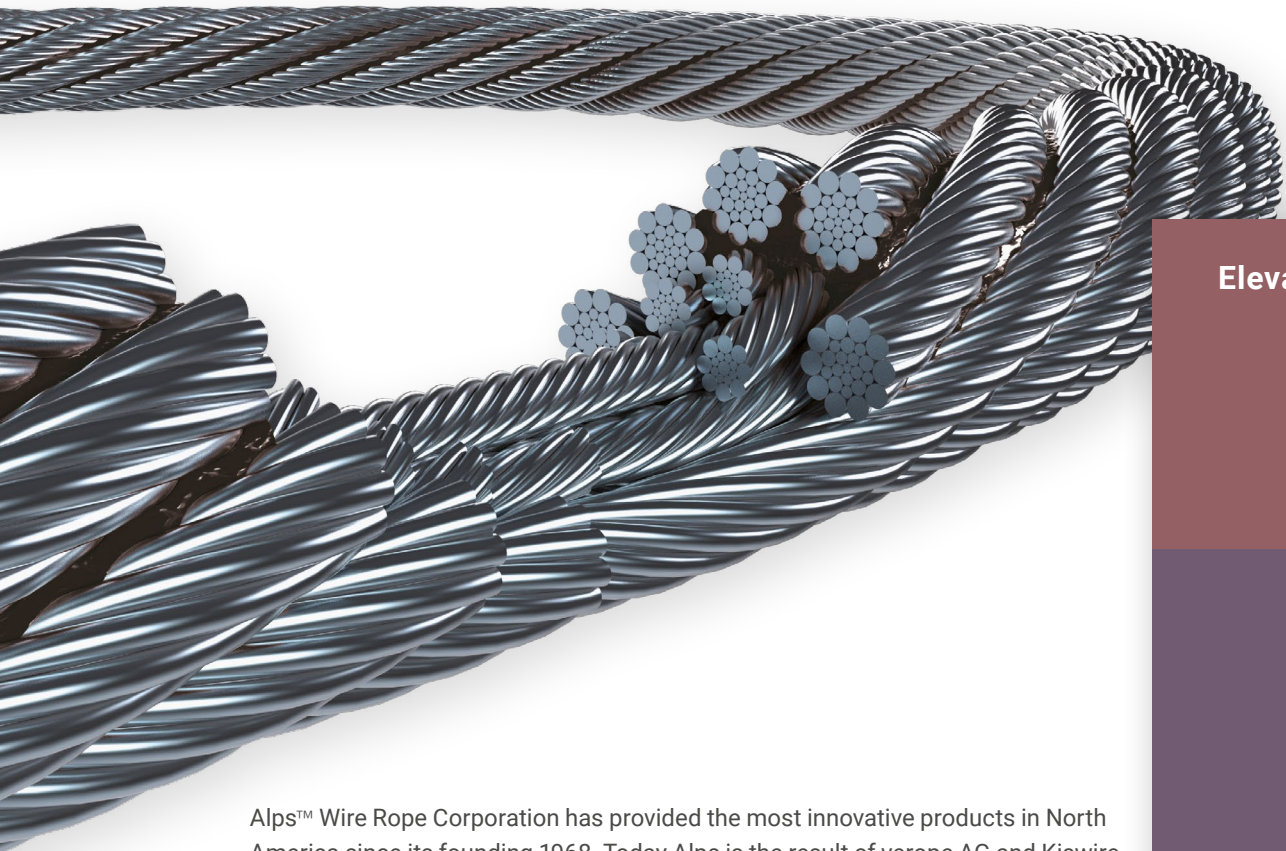


Alps™ Wire Rope Corporation has provided the most innovative products in North America since its founding 1968. Today Alps is the result of verope AG and Kiswire Ltd joining forces to offer the highest quality wire rope in the market.

alpswirerope.com

verope

Kiswire

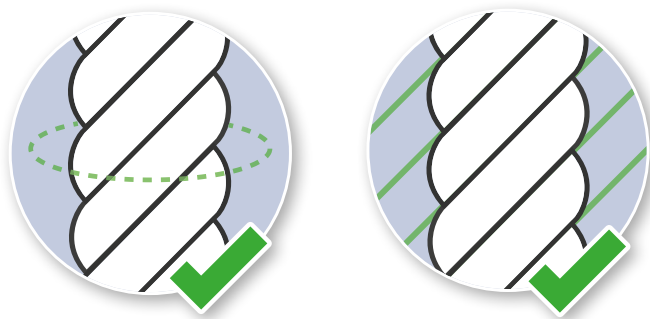

Consistent diameter  
& steady lay length

→ Learn more on page 59

PRE-STRETCHED

Let Alps wire ropes save you time:  
No re-adjusting needed.

Alps Elevator ropes are Pre-Stretched,  
at no additional cost to you.

Elevator Products

Low Rise Hoisting Ropes

Alps6 1S-EF	6x19 S	EHS	Fiber	HS	6
Alps6 2F-TF	6x25 Fi	Traction	Fiber	HS	8
Alps6 2F-EF	6x25 Fi	EHS	Fiber	HS	8
Alps6 2F-EI	6x25 Fi	EHS	IWRC	HS	10
AlpsXTRA8 1S-TF	8x19 S	Traction	Fiber	HS	12

Mid Rise Hoisting Ropes

AlpsXTRA8 1S-EF	8x19 S	EHS	Fiber	HS	16
AlpsXTRA8 1S-TI	8x19 S	Traction	IWRC	HS	18
AlpsXTRA8 1S-D13I	8x19 S	1370/1770	IWRC	HS	18
AlpsXTRA8 1S-EI	8x19 S	EHS	IWRC	HS	18
AlpsXTRA8 2F-IF	8x25 Fi	Iron	Fiber	HS	20

High Rise Hoisting Ropes

AlpsXTRA8 1W-D15I	8x19 W	1570/1770	IWRC	XS	24
AlpsXTRA8 2F-D15I	8x25 Fi	1570/1770	IWRC	XS	26

Governor & Door Ropes

Alps6 1S-IF	Governor Rope	Iron	Fiber	30
AlpsXTRA8 1S-IF	Governor Rope	Iron	Fiber	32
AlpsDR	Door & Governor Rope	1960	Steel	34

Additional Products	37
---------------------	----


Elevator wire rope wedge sockets	38
Reeving splices	40
Lubricant	41

Technical Information	45
-----------------------	----




Low Rise Hoisting Ropes


Wire Rope Construction Grade Core Lube Page




Alps6 1S-EF



Alps6 2F-TF  
Alps6 2F-EF



Alps6 2F-EI



AlpsXTRA8 1S-TF


Alps6 1S-EF	6x19 S	EHS	Fiber .. HS	6
Alps6 2F-TF	6x25 Fi	Traction	Fiber .. HS	8
Alps6 2F-EF	6x25 Fi	EHS	Fiber .. HS	8
Alps6 2F-EI	6x25 Fi	EHS	IWRC .. HS	10
AlpsXTRA8 1S-TF	8x19 S	Traction	Fiber .. HS	12



Alps6 1S-EF



Alps6 2F-TF  
Alps6 2F-EF



Alps6 2F-EI



AlpsXTRA8 1S-TF

Mid Rise Hoisting Ropes

AlpsXTRA8 1S-EF	8x19 S	EHS		
AlpsXTRA8 1S-TI	8x19 S	Trac		
AlpsXTRA8 1S-D13I	8x19 S	1370		
AlpsXTRA8 1S-EI	8x19 S	EHS		
AlpsXTRA8 2F-IF	8x25 Fi	Iron		

High Rise Hoisting Ropes

AlpsXTRA8 1W-D15I	8x19 W	1570/1770	IWRC	XS	24
AlpsXTRA8 2F-D15I	8x25 Fi	1570/1770	IWRC	XS	26

Governor & Door Ropes

Alps6 1S-IF	Governor Rope	Iron	Fiber	30
AlpsXTRA8 1S-IF	Governor Rope	Iron	Fiber	32
AlpsDR	Door & Governor Rope	1960	Steel	34

Additional Products	37
---------------------	----

Elevator wire rope wedge sockets	38
Reeving splices	40
Lubricant	41

Technical Information	45
-----------------------	----



Consistent diameter  
& steady lay length


→ Learn more on page 59

Let Alps wire ropes save you time:  
No re-adjusting needed.

Alps Elevator ropes are Pre-Stretched,  
at no additional cost to you.

# Alps<sup>6</sup> 1S – EF

6x19 S – FC

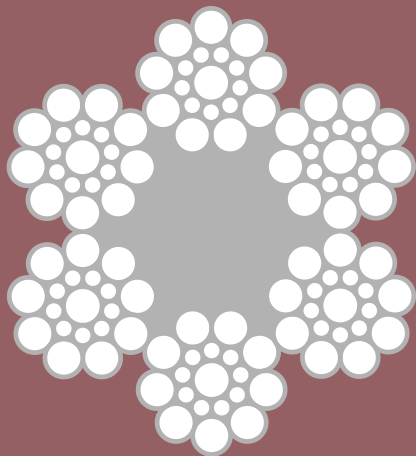

PRE-STRETCHED

Alps<sup>6</sup> 1S – EF

GRADE OPTIONS (N/mm<sup>2</sup>)  
EHS (1770 / 1770)

PREFERRABLE  
SHEAVE HARDNESS  
240 – 270 HB

DIAMETER RANGE

1/4 – 1/2 inch




CORE	Fiber
TOTAL ELONGATION AT 10 % MBL	≈ 0.41 %
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.18 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.23 %
PREFERRABLE FREQUENCE OF USE	≈ 2 times / hour
PREFERRABLE SPEED	< 6.56 ft / sec (2.0 m / sec)
OUTER STRAND DESIGN	Seale
NUMBER OF OUTER WIRES PER STRAND	9
NUMBER OF OUTER WIRES TOTAL	54
DISCARD ACCORDING ROPE CLASS	6x19    General discard criteria according to ISO 4344:2004


Alps <sup>6</sup> 1S -		EF EHS (1770 / 1770)			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
1/4	6.35	5,200	23.1	0.10	0.149
5/16	7.94	8,100	36.0	0.16	0.238
	8	8,100	36.0	0.16	0.238
3/8	9.53	11,600	51.6	0.23	0.342
	10	12,900	57.4	0.24	0.361
7/16	11.1	15,700	69.8	0.30	0.440
	12	18,300	81.4	0.35	0.517
1/2	12.7	20,400	90.7	0.40	0.595



Alps6 1S-EF



Alps6 2F-TF  
Alps6 2F-EF



Alps6 2F-EI




AlpsXTRA8 1S-TF

# Alps<sup>6</sup> 1S – EF



Alps<sup>6</sup> 2F – TF  
Alps<sup>6</sup> 2F – EF

6x25 Fi – FC

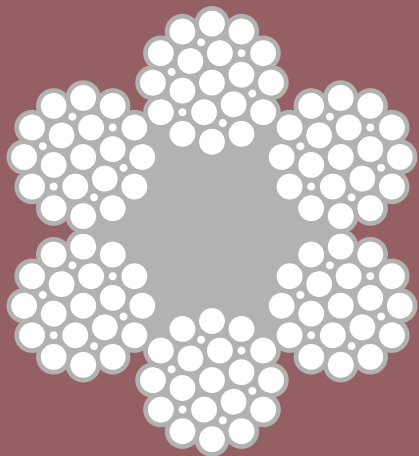

PRE-STRETCHED

Alps<sup>6</sup> 2F – TF  
Alps<sup>6</sup> 2F – EF

GRADE OPTIONS (N/mm<sup>2</sup>)

Traction (1180 / 1770)

EHS (1770 / 1770)

PREFERRABLE  
SHEAVE HARDNESS

170 – 200 HB

240 – 270 HB

DIAMETER RANGE

1/4 – 3/4 inch




CORE	Fiber
TOTAL ELONGATION AT 10% MBL	≈ 0.41 %
CONSTRUCTIVE ELONGATION AFTER 10% MBL	≈ 0.18 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.23 %
PREFERRABLE FREQUENCE OF USE	≈ 2 times / hour
PREFERRABLE SPEED	< 6.56 ft / sec (2.0 m / sec)
OUTER STRAND DESIGN	Filler
NUMBER OF OUTER WIRES PER STRAND	12
NUMBER OF OUTER WIRES TOTAL	72
DISCARD ACCORDING ROPE CLASS	6x19    General discard criteria according to ISO 4344:2004

Alps <sup>6</sup> 2F -		TF Traction (1180 / 1770)		EF EHS (1770 / 1770)			
Diameter		Minimum Breaking Force (MBL)				Calculated mass	
in	mm	lb	kN	lb	kN	lb/ft	kg/m
1/4	6.35	3,600	16.0	5,200	23.1	0.10	0.149
5/16	7.94	5,600	24.9	8,100	36.0	0.16	0.238
	8	5,600	24.9	8,100	36.0	0.16	0.240
3/8	9.53	8,200	36.5	11,600	51.6	0.23	0.342
	10	9,100	40.5	12,900	57.4	0.25	0.376
7/16	11.1	11,000	48.9	15,700	69.8	0.31	0.461
	12	12,900	57.4	18,300	81.4	0.36	0.535
1/2	12.7	14,500	64.5	20,400	90.7	0.40	0.595
	14	17,600	78.3	24,800	110.3	0.49	0.728
9/16	14.3	18,500	82.3	25,700	114.3	0.51	0.759
5/8	15.9	23,000	102.3	31,600	140.6	0.63	0.938
	16	23,000	102.3	31,600	140.6	0.64	0.951
	18	28,600	127.2	40,400	179.7	0.81	1.204
3/4	19.1	32,000	142.3	45,200	201.1	0.90	1.339


Alps<sup>6</sup> 2F – TF  
Alps<sup>6</sup> 2F – EF



Alps6 1S-EF



Alps6 2F-TF  
Alps6 2F-EF




Alps6 2F-EI



AlpsXTRA8 1S-TF

# Alps<sup>6</sup> 2F – EI

6x25 Fi – IWRC

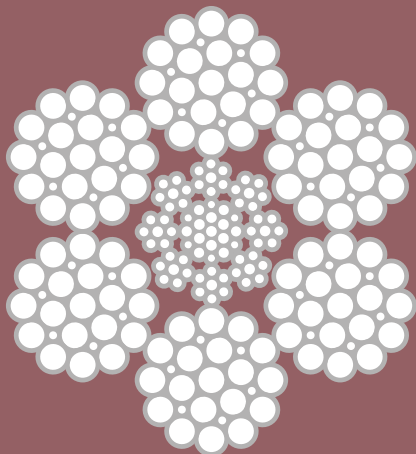

Alps6 2F – EI

GRADE OPTIONS (N/mm<sup>2</sup>)

EHS (1770 / 1770)

PREFERRABLE  
SHEAVE HARDNESS

240 – 270 HB

DIAMETER RANGE

1/4 – 3/4 inch



CORE	IWRC
TOTAL ELONGATION AT 10 % MBL	≈ 0.37 %
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.17 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.20 %
PREFERRABLE FREQUENCE OF USE	≈ 2 times / hour
PREFERRABLE SPEED	< 6.56 ft / sec (2.0 m / sec)
OUTER STRAND DESIGN	Filler
NUMBER OF OUTER WIRES PER STRAND	12
NUMBER OF OUTER WIRES TOTAL	72
DISCARD ACCORDING ROPE CLASS	6x19    General discard criteria according to ISO 4344:2004

Alps <sup>6</sup> 2F -		EI EHS (1770 / 1770)			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
1/4	6.35	6,137	27.3	0.114	0.169
5/16	7.94	9,596	42.7	0.178	0.265
	8	9,743	43.3	0.181	0.269
3/8	9.53	13,809	61.4	0.256	0.381
	10	15,224	67.7	0.283	0.421
7/16	11.1	18,787	83.6	0.348	0.519
	12	20,143	89.6	0.374	0.557
1/2	12.7	24,549	109.2	0.456	0.68
	14	29,832	132.7	0.554	0.83
9/16	14.3	31,069	138.2	0.577	0.86
5/8	15.9	38,487	171.2	0.715	1.064
	16	38,982	173.4	0.724	1.077
	18	49,323	219.4	0.916	1.363
3/4	19.1	55,528	247.0	1.032	1.535


# Alps<sup>6</sup> 2F – EI



Alps6 1S-EF



Alps6 2F-TF  
Alps6 2F-EF



Alps6 2F-EI




AlpsXTRA8 1S-TF



# AlpsXTRA<sup>8</sup> 1S – TF

8x19 S – FC

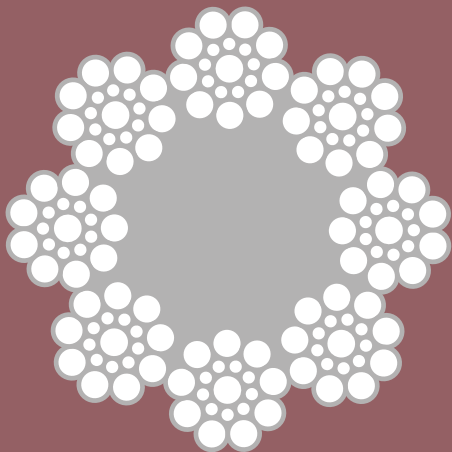

PRE-STRETCHED

AlpsXTRA8 1S – TF

GRADE OPTIONS (N/mm<sup>2</sup>)

Traction (1180 / 1770)

PREFERRABLE  
SHEAVE HARDNESS

170 – 200 HB

DIAMETER RANGE

1/4 – 3/4 inch




CORE	Fiber
TOTAL ELONGATION AT 10 % MBL	≈ 0.50 %
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.27 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.23 %
PREFERRABLE FREQUENCE OF USE	≈ 2 times / hour
PREFERRABLE SPEED	< 6.56 ft / sec (2.0 m / sec)
OUTER STRAND DESIGN	Filler
NUMBER OF OUTER WIRES PER STRAND	9
NUMBER OF OUTER WIRES TOTAL	72
DISCARD ACCORDING ROPE CLASS	8x19    General discard criteria according to ISO 4344:2004

AlpsXTRA <sup>8</sup> 1S -		TF Traction (1180/ 1770)			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
1/4	6.35	3,600	16.0	0.09	0.134
5/16	7.94	5,600	24.9	0.14	0.208
	8	5,600	24.9	0.15	0.222
3/8	9.53	8,200	36.5	0.20	0.298
	10	9,100	40.5	0.23	0.347
	11	11,000	48.9	0.28	0.417
7/16	11.1	11,000	48.9	0.28	0.420
	12	12,900	57.4	0.33	0.490
1/2	12.7	14,500	64.5	0.36	0.536
	14	17,600	78.3	0.45	0.666
9/16	14.3	18,500	82.3	0.46	0.685
5/8	15.9	23,000	102.3	0.57	0.848
	16	23,000	102.3	0.60	0.888
11/16	17.5	27,000	120.1	0.69	1.027
	18	28,600	127.2	0.74	1.100
3/4	19.1	32,000	142.3	0.82	1.220


# AlpsXTRA<sup>8</sup> 1S – TF



Alps6 1S-EF



Alps6 2F-TF  
Alps6 2F-EF



Alps6 2F-EI



AlpsXTRA8 1S-TF




Mid Rise Hoisting Ropes


Wire Rope Construction Grade Core Lube Page

Low Rise Hoisting Ropes


Alps6 1S-EF	6x19 S	EHS	Fiber	HS	6
Alps6 2F-TF	6x25 Fi	Traction	Fiber	HS	8
Alps6 2F-EF	6x25 Fi	EHS	Fiber	HS	8
Alps6 2F-EI	6x25 Fi	EHS	IWRC	HS	10
AlpsXTRA8 1S-TF	8x19 S	Traction	Fiber	HS	12



AlpsXTRA8 1S-EF




AlpsXTRA8 1S-TI  
AlpsXTRA8 1S-D13I  
AlpsXTRA8 1S-EI




AlpsXTRA8 2F-IF

AlpsXTRA8 1S-EF	8x19 S	EHS	Fiber	HS	16
AlpsXTRA8 1S-TI	8x19 S	Traction	IWRC	HS	18
AlpsXTRA8 1S-D13I	8x19 S	1370/1770	IWRC	HS	18
AlpsXTRA8 1S-EI	8x19 S	EHS	IWRC	HS	18
AlpsXTRA8 2F-IF	8x25 Fi	Iron	Fiber	HS	20



AlpsXTRA8 1S-EF



AlpsXTRA8 1S-TI  
AlpsXTRA8 1S-D13I  
AlpsXTRA8 1S-EI

High Rise Hoisting Ropes

AlpsXTRA8 1W-D15I	8x19 W	1570
AlpsXTRA8 2F-D15I	8x25 Fi	1570


Governor & Door Ropes

Alps6 1S-IF	Governor Rope	Iron	Fiber	30
AlpsXTRA8 1S-IF	Governor Rope	Iron	Fiber	32
AlpsDR	Door & Governor Rope	1960	Steel	34

Additional Products	37
---------------------	----

Elevator wire rope wedge sockets	38
Reeving splices	40
Lubricant	41

Technical Information	45
-----------------------	----



AlpsXTRA8 2F-IF

PRE-STRETCHED

Consistent diameter  
& steady lay length

→ Learn more on page 59


Let Alps wire ropes save you time:  
No re-adjusting needed.

Alps Elevator ropes are Pre-Stretched,  
at no additional cost to you.



# AlpsXTRA<sup>8</sup> 1S – EF

8x19 S - FC

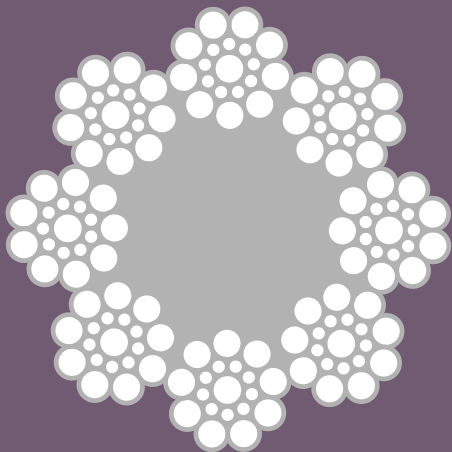

PRE-STRETCHED

AlpsXTRA8 1S – EF

GRADE OPTIONS (N/mm<sup>2</sup>)  
EHS (1770 / 1770)

PREFERRABLE  
SHEAVE HARDNESS  
240 – 270 HB

DIAMETER RANGE


1/4 – 3/4 inch




CORE	Fiber
TOTAL ELONGATION AT 10 % MBL	≈ 0.50 %
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.27 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.23 %
PREFERRABLE FREQUENCE OF USE	≈ 5 times / hour
PREFERRABLE SPEED	< 9.84 ft / sec (3.0 m / sec)
OUTER STRAND DESIGN	Seale
NUMBER OF OUTER WIRES PER STRAND	9
NUMBER OF OUTER WIRES TOTAL	72
DISCARD ACCORDING ROPE CLASS	8x19    General discard criteria according to ISO 4344:2004

AlpsXTRA <sup>8</sup> 1S - EF		EHS (1770 / 1770)			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
1/4	6.35	4,500	20.0	0.09	0.134
5/16	7.94	6,900	30.7	0.14	0.208
	8	6,900	30.7	0.15	0.222
3/8	9.53	9,900	44.0	0.20	0.298
	10	11,000	48.9	0.23	0.347
	11	13,500	60.1	0.28	0.417
7/16	11.1	13,500	60.1	0.28	0.420
	12	15,800	70.3	0.33	0.490
1/2	12.7	17,500	77.8	0.36	0.536
	14	20,200	89.9	0.45	0.666
9/16	14.3	22,100	98.3	0.46	0.685
5/8	15.9	27,200	121.0	0.57	0.848
	16	27,200	121.0	0.60	0.888
11/16	17.5	32,800	145.9	0.69	1.027
	18	34,700	154.4	0.74	1.100
3/4	19.1	38,900	173.0	0,82	1,220


# AlpsXTRA<sup>8</sup> 1S – EF



AlpsXTRA8 1S-EF




AlpsXTRA8 1S-TI  
AlpsXTRA8 1S-D13I  
AlpsXTRA8 1S-EI



AlpsXTRA8 2F-IF

AlpsXTRA<sup>8</sup> 1S – TI  
AlpsXTRA<sup>8</sup> 1S – D13I  
AlpsXTRA<sup>8</sup> 1S – EI

8x19 S – IWRC

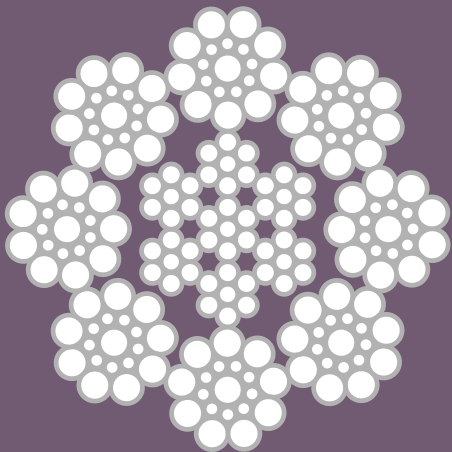

	GRADE OPTIONS (N/mm <sup>2</sup> )	PREFERRABLE SHEAVE HARDNESS
AlpsXTRA8 1S – TI	Traction (1180 / 1770)	170 – 200 HB
AlpsXTRA8 1S – D13I	Dual (1370 / 1770)	190 – 230 HB
AlpsXTRA8 1S – EI	EHS (1770 / 1770)	240 – 270 HB


DIAMETER RANGE  
1/4 – 22 inch




CORE	IWRC
TOTAL ELONGATION AT 10% MBL	≈ 0.42 %
CONSTRUCTIVE ELONGATION AFTER 10% MBL	≈ 0.22 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.20%
PREFERRABLE FREQUENCE OF USE	≈ 5 times / hour
PREFERRABLE SPEED	< 9.84 ft / sec (3.0 m / sec)
OUTER STRAND DESIGN	Seale
NUMBER OF OUTER WIRES PER STRAND	9
NUMBER OF OUTER WIRES TOTAL	54
DISCARD ACCORDING ROPE CLASS	8x19    General discard criteria according to ISO 4344:2004

Alps XTRA <sup>8</sup> 1S -		TI Traction (118 0/ 1770)		D13I Dual (1370 / 1770)		EI EHS (1770 / 1770)			
Diameter		Minimum Breaking Force (MBL)						Calculated mass	
in	mm	lb	kN	lb	kN	lb	kN	lb/ft	kg/m
1/4	6.35	5,100	22.7	5,101	22.7	5,700	25.4	0.111	0.165
5/16	7.94	7,900	35.1	7,901	35.1	8,900	39.6	0.172	0.256
	8	8,040	35.8	8,048	35.8	9,055	40.3	0.175	0.261
3/8	9.53	11,400	50.7	11,402	50.7	12,900	57.4	0.247	0.368
	10	12,563	55.9	12,567	55.9	14,149	62.9	0.274	0.407
	11	15,201	67.6	15,197	67.6	17,120	76.2	0.331	0.493
7/16	11.1	15,500	69.0	15,502	69.0	17,500	77.9	0.337	0.501
	12	18,091	80.5	18,097	80.5	20,375	90.6	0.394	0.587
1/2	12.7	20,300	90.3	20,303	90.3	22,800	101.4	0.441	0.656
	13	21,232	94.4	21,245	94.5	23,912	106.4	0.463	0.688
	14	24,624	109.5	24,729	110	27,732	123.4	0.537	0.798
9/16	14.3	25,600	113.9	25,604	113.9	28,900	128.6	0.560	0.833
5/8	15.9	31,700	141.0	31,704	141.0	35,700	158.8	0.692	1.030
	16	32,162	143.1	32,148	143	36,221	161.1	0.701	1.043
11/16	17.5	38,300	170.4	38,299	170.4	43,200	192.2	0.838	1.242
	18	40,705	181.1	40,691	181	45,843	203.9	0.887	1.320
3/4	19.1	45,600	202.9	45,606	202.9	51,400	228.7	0.998	1.485
	22	60.806	270.5	60,806	270.5	68.481	304.6	1.325	1.972


AlpsXTRA<sup>8</sup> 1S – TI  
AlpsXTRA<sup>8</sup> 1S – D13I  
AlpsXTRA<sup>8</sup> 1S – EI



AlpsXTRA8 1S-EF



AlpsXTRA8 1S-TI  
AlpsXTRA8 1S-D13I  
AlpsXTRA8 1S-EI




AlpsXTRA8 2F-IF



# AlpsXTRA<sup>8</sup> 2F – IF

8x25 Fi – FC

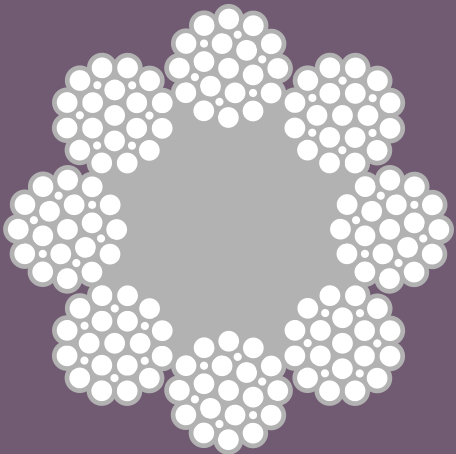

PRE-STRETCHED

AlpsXTRA 8 2F – IF

GRADE OPTIONS (N/mm<sup>2</sup>)

IRON (680 / 1770)

PREFERRABLE  
SHEAVE HARDNESS

< 180 HB

DIAMETER RANGE


1/4 – 3/4 inch




CORE	Fiber
TOTAL ELONGATION AT 10 % MBL	≈ 0.50%
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.27 %
ELASTIC ELONGATION BETWEEN 2% AND 10 % LOAD	≈ 0.23 %
PREFERRABLE FREQUENCE OF USE	≈ 10 times / hour
PREFERRABLE SPEED	< 13.12 ft /sec (4.0 m / sec)
OUTER STRAND DESIGN	Filler
NUMBER OF OUTER WIRES PER STRAND	12
NUMBER OF OUTER WIRES TOTAL	96
DISCARD ACCORDING ROPE CLASS	8x19    General discard criteria according to ISO 4344:2004

AlpsXTRA <sup>8</sup> 2F -		IF <small>Iron (680 / 1770)</small>			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
1/4	6.35	1,800	8.0	0.09	0.134
5/16	7.94	2,900	12.9	0.14	0.208
	8	2,900	12.9	0.15	0.222
3/8	9.53	4,200	18.7	0.20	0.298
	10	4,700	20.9	0.23	0.347
	11	5,600	24.9	0.28	0.417
7/16	11.1	5,600	24.9	0.28	0.420
	12	6,500	28.9	0.33	0.490
1/2	12.7	7,200	32.0	0.36	0.536
	13	7,496	33.6	0.39	0.586
	14	8,700	38.7	0.45	0.666
9/16	14.3	9,200	40.9	0.46	0.685
5/8	15.9	11,200	49.8	0.57	0.848
	16	11,200	49.8	0.60	0.888
11/16	17.5	13,400	59.6	0.69	0.888
	18	14,200	63.2	0.74	1.100
3/4	19.1	16,000	71.2	0.82	1.220


# AlpsXTRA<sup>8</sup> 2F – IF



AlpsXTRA8 1S-EF



AlpsXTRA8 1S-TI  
AlpsXTRA8 1S-D13I  
AlpsXTRA8 1S-EI



AlpsXTRA8 2F-IF

# High Rise Hoisting Ropes


Wire Rope	Construction	Grade	Core	Lube	Page
-----------	--------------	-------	------	------	------

## Low Rise Hoisting Ropes


Alps6 1S-EF	6x19 S	EHS	Fiber	HS	6
Alps6 2F-TF	6x25 Fi	Traction	Fiber	HS	8
Alps6 2F-EF	6x25 Fi	EHS	Fiber	HS	8
Alps6 2F-EI	6x25 Fi	EHS	IWRC	HS	10
AlpsXTRA8 1S-TF	8x19 S	Traction	Fiber	HS	12

## Mid Rise Hoisting Ropes

AlpsXTRA8 1S-EF	8x19 S	EHS	Fiber	HS	16
AlpsXTRA8 1S-TI	8x19 S	Traction	IWRC	HS	18
AlpsXTRA8 1S-D13I	8x19 S	1370/1770	IWRC	HS	18
AlpsXTRA8 1S-EI	8x19 S	EHS	IWRC	HS	18
AlpsXTRA8 2F-IF	8x25 Fi	Iron	Fiber	HS	20



AlpsXTRA8 1W-D15I



AlpsXTRA8 2F-D15I

AlpsXTRA8 1W-D15I	8x19 W	1570/1770	IWRC	XS	24
AlpsXTRA8 2F-D15I	8x25 Fi	1570/1770	IWRC	XS	26

## Governor & Door Ropes

Alps6 1S-IF	Governor Rope	Iron			
AlpsXTRA8 1S-IF	Governor Rope	Iron			
AlpsDR	Door & Governor Rope	1960			4

Additional Products	37
---------------------	----

Elevator wire rope wedge sockets	38
Reeving splices	40
Lubricant	41

Technical Information	45
-----------------------	----




Consistent diameter  
& steady lay length


→ Learn more on page 59

Let Alps wire ropes save you time:  
No re-adjusting needed.

Alps Elevator ropes are Pre-Stretched,  
at no additional cost to you.



AlpsXTRA8 1W-D15I




AlpsXTRA8 2F-D15I



# AlpsXTRA<sup>8</sup> 1W – D15I

8x19 W – IWRC

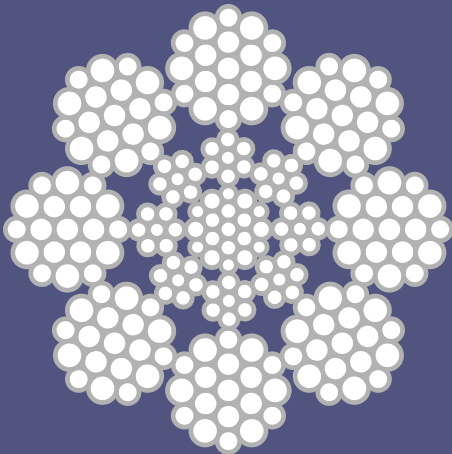

AlpsXTRA 8 1W – D15I

GRADE OPTIONS (N/mm<sup>2</sup>)  
Dual 1570 / 1770

PREFERRABLE  
SHEAVE HARDNESS  
220 – 250 HB

DIAMETER RANGE  
6 – 10 mm


CORE	IWRC
TOTAL ELONGATION AT 10 % MBL	≈ 0.42 %
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.22 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.20 %
PREFERRABLE FREQUENCE OF USE	≈ 20 times / hour
PREFERRABLE SPEED	< 16.40 ft / sec (5.0 m / sec)
OUTER STRAND DESIGN	Warrington
NUMBER OF OUTER WIRES PER STRAND	12
NUMBER OF OUTER WIRES TOTAL	96
DISCARD ACCORDING ROPE CLASS	8x19    General discard criteria according to ISO 4344:2004

AlpsXTRA <sup>8</sup> 1W -		D15I Dual (1570 / 1770)			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
	6	4,810	21.4	0.08	0.123
1/4	6.35	5,390	24.0	0.09	0.137
5/16	7.94	8,427	37.5	0.14	0.215
	8	8,542	38.0	0.17	0.260
	9	10,834	48.2	0.22	0.330
3/8	9.53	12,139	54.0	0.25	0.370
	10	13,374	59.5	0.27	0.407
	13	22,478	100.0	0.46	0.688

# AlpsXTRA<sup>8</sup> 1W – D15I




AlpsXTRA8 1W-D15I



AlpsXTRA8 2F-D15I

# AlpsXTRA<sup>8</sup> 2F – D15I

8x25 Fi – IWRC

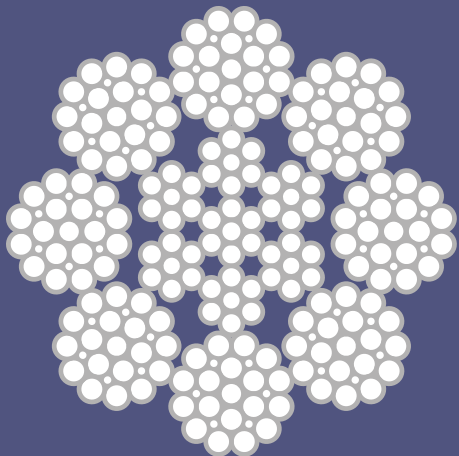

AlpsXTRA 8 2F – D15I

GRADE OPTIONS (N/mm<sup>2</sup>)  
Dual 1570 / 1770

PREFERRABLE  
SHEAVE HARDNESS  
220 – 250 HB


DIAMETER RANGE  
1/4 – 22 mm




CORE	IWRC
TOTAL ELONGATION AT 10% MBL	≈ 0.42 %
CONSTRUCTIVE ELONGATION AFTER 10% MBL	≈ 0.22 %
ELASTIC ELONGATION BETWEEN 2% AND 10% LOAD	≈ 0.20 %
PREFERRABLE FREQUENCE OF USE	≈ 10 times / hour
PREFERRABLE SPEED	< 13.12 ft /sec (4.0 m / sec)
OUTER STRAND DESIGN	Filler
NUMBER OF OUTER WIRES PER STRAND	12
NUMBER OF OUTER WIRES TOTAL	96
DISCARD ACCORDING ROPE CLASS	8x19    General discard criteria according to ISO 4344:2004

AlpsXTRA <sup>8</sup> 2F - D15I		Dual (1570 / 1770)			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
1/4	6.35	5,404	24.0	0.11	0.164
5/16	7.94	8,450	37.6	0.17	0.256
	8	8,542	38.0	0.17	0.260
3/8	9.53	12,160	54.1	0.25	0.369
	10	13,374	59.5	0.27	0.407
	11	16,162	71.9	0.33	0.492
7/16	11.1	16,544	73.6	0.34	0.502
	12	19,241	85.6	0.39	0.586
1/2	12.7	21,618	96.2	0.44	0.656
	13	22,651	100.8	0.46	0.687
	14	26,299	117.0	0.54	0.798
9/16	14.3	27,370	121.8	0.56	0.830
5/8	15.9	33,778	150.3	0.69	1.024
	16	34,166	152.0	0.70	1.040
11/16	17.5	40,711	181.1	0.70	1.040
	18	43,382	193.0	0.89	1.320
3/4	19.1	48,640	216.4	0.99	1.475
	22	64,871	288.6	1.32	1.967

# AlpsXTRA<sup>8</sup> 2F – D15I




AlpsXTRA8 1W-D15I



AlpsXTRA8 2F-D15I



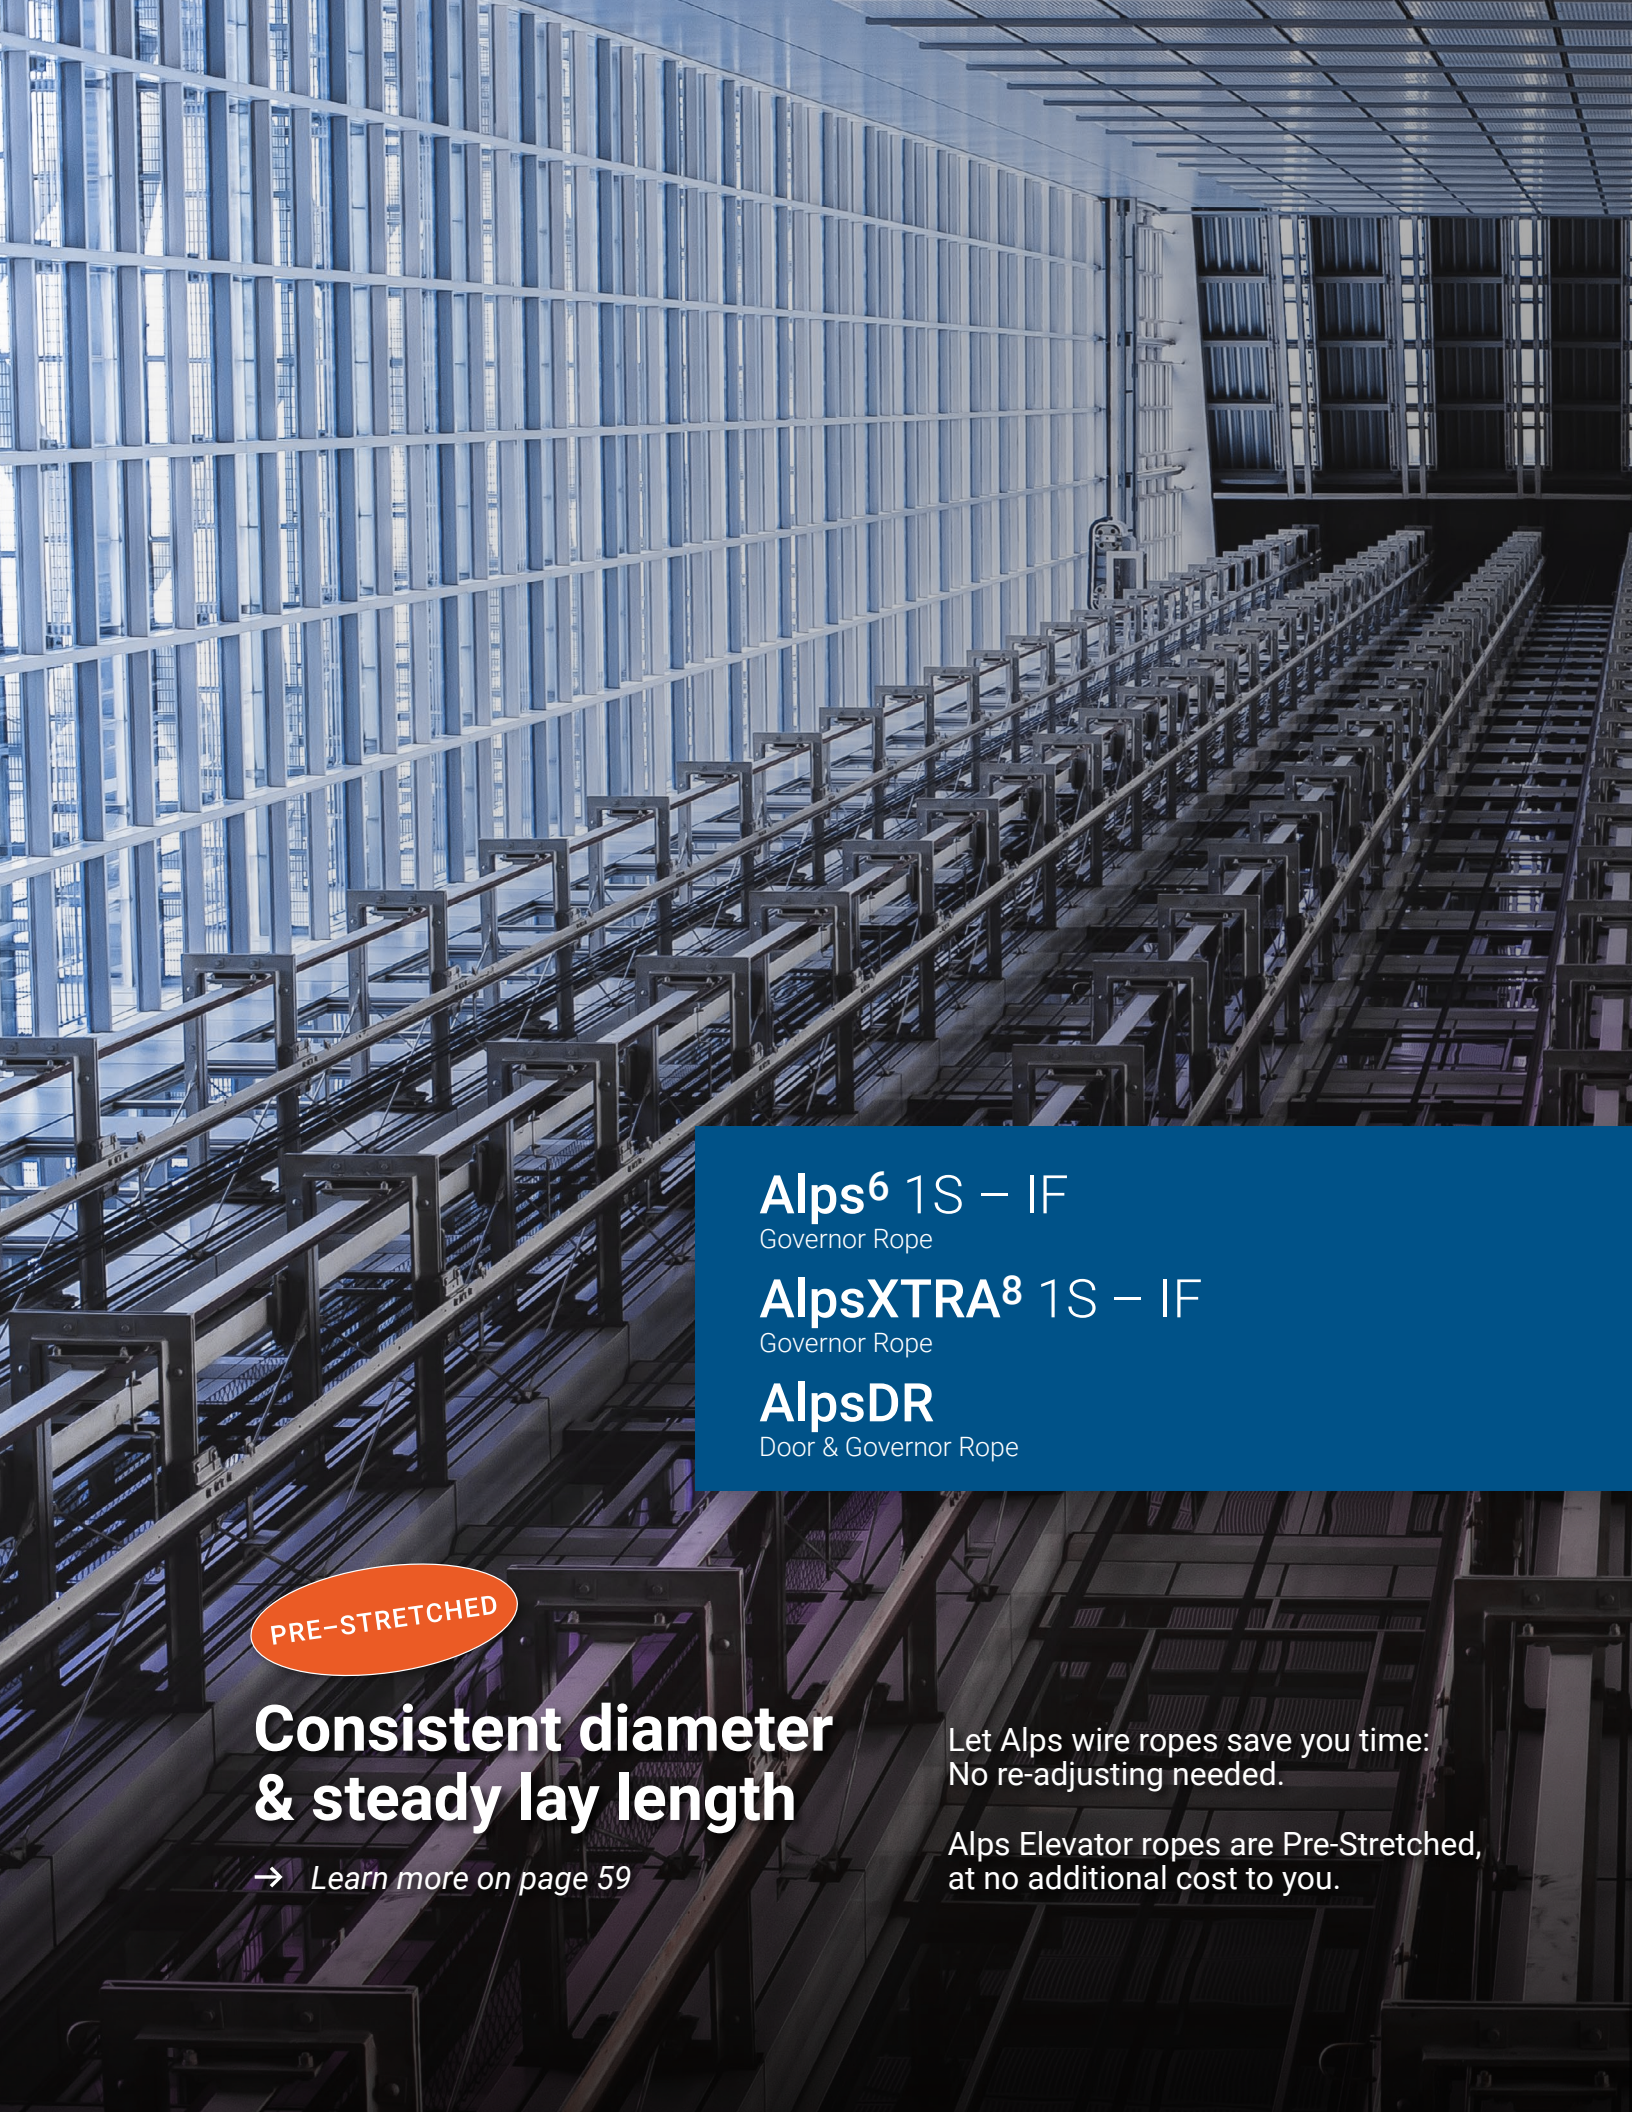

# Governor & Door Ropes

Wire Rope                      Construction                      Grade                      Core                      Lube                      Page

## Low Rise Hoisting Ropes

Alps6 1S-EF .....	6x19 S.....	EHS .....	Fiber .....	HS .....	6
Alps6 2F-TF .....	6x25 Fi.....	Traction.....	Fiber .....	HS .....	8
Alps6 2F-EF .....	6x25 Fi.....	EHS .....	Fiber .....	HS .....	8
Alps6 2F-EI .....	6x25 Fi.....	EHS .....	IWRC.....	HS .....	10
AlpsXTRA8 1S-TF .....	8x19 S.....	Traction.....	Fiber .....	HS .....	12

## Mid Rise Hoisting Ropes

AlpsXTRA8 1S-EF.....	8x19 S.....	EHS .....	Fiber .....	HS .....	16
AlpsXTRA8 1S-TI.....	8x19 S.....	Traction.....	Fiber .....	HS .....	18
AlpsXTRA8 1S-D13I.....	8x19 S.....	1370/1770.....	Fiber .....	HS .....	18
AlpsXTRA8 1S-EI.....	8x19 S.....	EHS .....	Fiber .....	HS .....	18
AlpsXTRA8 2F-IF.....	8x25 Fi.....	Iron .....	Fiber .....	HS .....	18

## High Rise Hoisting Ropes

AlpsXTRA8 1W-D15I .....	8x19 W.....	1570/1770.....	Fiber .....	HS .....	18
AlpsXTRA8 2F-D15I .....	8x25 Fi.....	1570/1770.....	Fiber .....	HS .....	18



**Alps<sup>6</sup> 1S – IF**  
Governor Rope

**AlpsXTRA<sup>8</sup> 1S – IF**  
Governor Rope

**AlpsDR**  
Door & Governor Rope

Alps6 1S-IF .....	Governor Rope ...	Iron .....	Fiber .....	30
AlpsXTRA8 1S-IF .....	Governor Rope ...	Iron .....	Fiber .....	32
AlpsDR.....	Door & Governor ..	1960.....	Steel .....	34

Additional Products .....	37
Elevator wire rope wedge sockets .....	38
Reeving splices .....	40
Lubricant .....	41
Technical Information .....	45

PRE-STRETCHED

Consistent diameter  
& steady lay length


→ Learn more on page 59

Let Alps wire ropes save you time:  
No re-adjusting needed.

Alps Elevator ropes are Pre-Stretched,  
at no additional cost to you.



Alps6 1S-IF



AlpsXTRA8 1S-IF




AlpsDR



# Alps<sup>6</sup> 1S – IF

6x19 S – FC    Governor

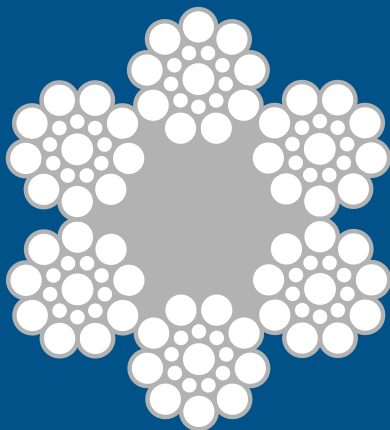

PRE-STRETCHED

Alps6 1S – IF

GRADE OPTIONS (N/mm<sup>2</sup>)  
Iron (680 / 1770)

PREFERRABLE  
SHEAVE HARDNESS  
< 180 HB

DIAMETER RANGE  
6mm – 1/2 inch




CORE	Fiber
TOTAL ELONGATION AT 10 % MBL	≈ 0.41 %
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.18%
ELASTIC ELONGATION BETWEEN 2% AND 10 % LOAD	≈ 0.23 %
OUTER STRAND DESIGN	Seale
NUMBER OF OUTER WIRES PER STRAND	9
NUMBER OF OUTER WIRES TOTAL	54
DISCARD ACCORDING ROPE CLASS	6x19    General discard criteria according to ISO 4344:2004

Alps <sup>6</sup> 1S -		IF Iron (680 / 1770)			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
	6	1,872	8.3	0,09	0,140
1/4	6,35	2,200	9.8	0,10	0,149
5/16	7,94	3,200	14.2	0,16	0,238
	8	3,362	15.0	0,16	0,238
3/8	9,53	5,000	22.2	0,23	0,342
	10	5,195	23.1	0,24	0,361
7/16	11,1	6,400	28.5	0,30	0,440
	12	7,488	33.3	0,35	0,517
1/2	12,7	8,400	37.4	0,40	0,595



Alps6 1S-IF



AlpsXTRA8 1S-IF




AlpsDR

# Alps<sup>6</sup> 1S – IF

# AlpsXTRA<sup>8</sup> 1S – IF

8x19 FS – FC Governor

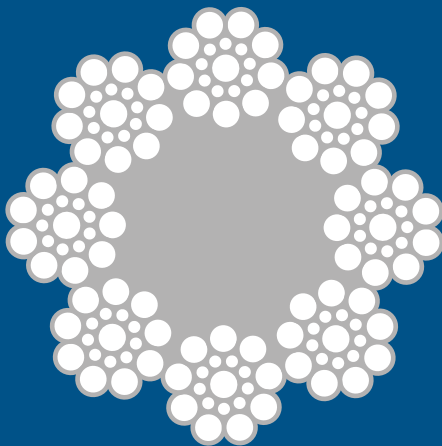

PRE-STRETCHED

AlpsXTRA 8 1S – IF

GRADE OPTIONS (N/mm<sup>2</sup>)

Iron (680 / 1770)

PREFERRABLE  
SHEAVE HARDNESS

< 180 HB

DIAMETER RANGE

1/4 – 3/4 inch



CORE	Seale
TOTAL ELONGATION AT 10 % MBL	≈ 0.50 %
CONSTRUCTIVE ELONGATION AFTER 10 % MBL	≈ 0.27 %
ELASTIC ELONGATION BETWEEN 2% AND 10 % LOAD	≈ 0.23 %
OUTER STRAND DESIGN	Seale
NUMBER OF OUTER WIRES PER STRAND	9
NUMBER OF OUTER WIRES TOTAL	72
DISCARD ACCORDING ROPE CLASS	8x19    General discard criteria according to ISO 4344:2004


## Minimum Breaking Force

AlpsXTRA <sup>8</sup> 1S -		IF <small>Iron (680 / 1770)</small>			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
1/4	6.35	1,800	8.0	0.09	0.134
5/16	7.94	2,900	12.9	0.14	0.208
	8	2,900	12.9	0.15	0.222
3/8	9.53	4,200	18.7	0.20	0.298
	10	4,700	20.9	0.23	0.347
	11	5,600	24.9	0.28	0.417
7/16	11.1	5,600	24.9	0.28	0.420
	12	6,500	28.9	0.33	0.490
1/2	12.7	7,200	32.0	0.36	0.536
	14	8,700	38.7	0.45	0.666
9/16	14.3	9,200	40.9	0.46	0.685
5/8	15.9	11,200	49.8	0.57	0.848
	16	11,200	49.8	0.60	0.888
	18	14,200	63.2	0.74	1.100
3/4	19.1	16,000	71.2	0.82	1.220

# AlpsXTRA<sup>8</sup> 1S – IF



Alps6 1S-IF




AlpsXTRA8 1S-IF



AlpsDR

# AlpsDr

7x19 Door

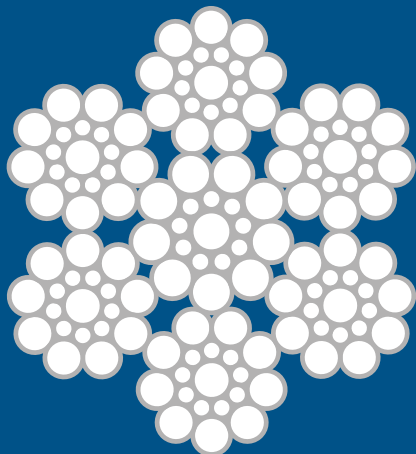

AlpsDr

GRADE OPTIONS (N/mm<sup>2</sup>)  
1960

PREFERRABLE  
SHEAVE HARDNESS  
< 180 HB

DIAMETER RANGE  
3 mm – 1/4 inch ○ — ○


CORE	Steel
FINISH	Galvanized

AlpsDr		1960			
Diameter		Minimum Breaking Force (MBL)		Calculated mass	
in	mm	lb	kN	lb/ft	kg/m
	3.0	1,962	8.7	0.03	0.051
1/8	3.2	2,001	8.9	0.04	0.058
	4.0	3,488	15.5	0.06	0.091
	5.0	3,911	17.4	0.067	0.100
1/4	6.35	9,012	40.1	0.15	0.230

# AlpsDr



Alps6 1S-IF



AlpsXTRA8 1S-IF



AlpsDR







# Additional Products

Wire Rope

Low Rise Hoisting Ropes ..... 4

Mid Rise Hoisting Ropes ..... 14

High Rise Hoisting Ropes ..... 22

Governor & Door Ropes ..... 28

Additional Products

**Elevator wire rope wedge sockets..... 38**

**Reeving splices ..... 40**


**Lubricant ..... 41**

Technical Information ..... 45

# Elevator wire rope wedge sockets

WEDGE SOCKET ASSEMBLY SPECIFICATIONS

Part No.	Size	A	B	C	Nut Size	H
ELZ 14	1/4" – 5/16" (6 – 8 mm)	5"	12", 18", 24"	9.05"	M12	17", 23", 29"
ELZ 38	3/8" (10 mm)	6"	12", 18", 24"	9.05"	M14	17", 23", 29"
ELZ 12	7/16" – 1/2" (11 – 13 mm)	7.5"	12", 18", 24", 30", 36", 42"	9.05"	M20	18", 24", 30", 36", 42", 48"
ELZ 58	9/16" – 5/8" (14 – 16 mm)	7.5"	12", 18", 24", 30", 36", 42"	9.05"	M20	18", 24", 30", 36", 42", 48"
ELZ 34	11/16" – 3/4" (17.5 – 19 mm)	9"	12", 18", 24", 30", 36", 42"	9.05"	M24	19.5", 25.5", 31.5", 37.5", 43.5", 49.5"

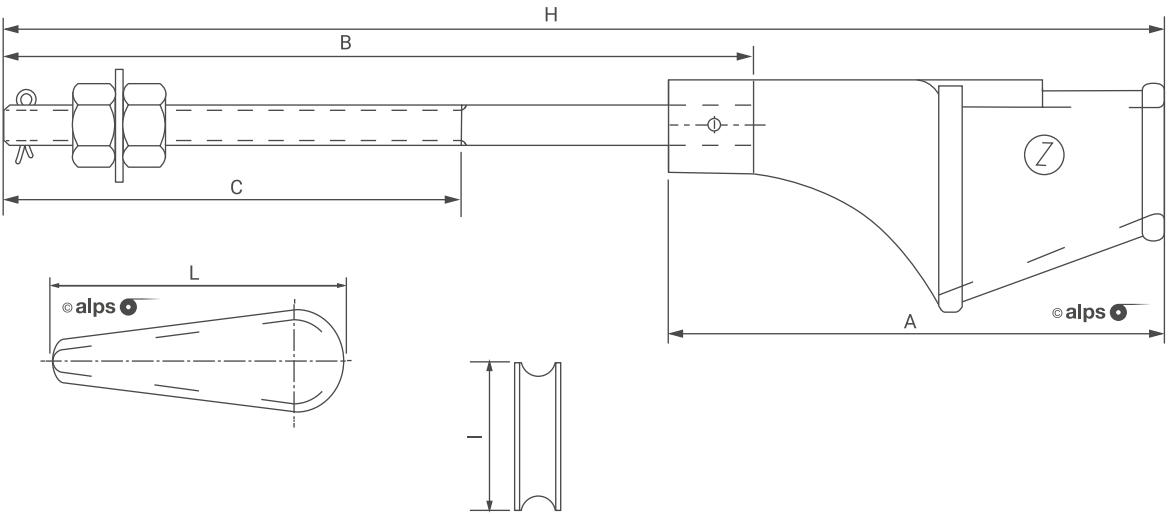


WEDGE INSERT SPECIFICATIONS

Part No.	Size	L	I	Color
EL ZZWW8	1/4" – 5/16" (6 – 8 mm)	3.25"	0.9"	White
EL ZZWW10	3/8" (10 mm)	3.75"	1.3"	Red
EL ZZWW13	7/16" – 1/2" (11 – 13 mm)	4"	1.6"	Blue
EL ZZWW16	9/16" – 5/8" (14 – 16 mm)	4.7"	1.3"	Yellow
EL ZZWW19	11/16" – 3/4" (17.5 – 19 mm)	5.5"	1.57"	Green

RETAINING CLIP SPECIFICATIONS

Part No.	Size	N	O	P	Nut Size	Bolt Size
EL ZZWRC810	1/4" – 5/16" (6 – 8 mm)	1"	1.58"	9.05"	M6	M6 x 30 mm
EL ZZWRC1316	7/16" – 5/8" (10 mm)	1"	1.84"	9.05"	M6	M6 x 35 mm
EL ZZWRC19	11/16" – 3/4" (17.5 – 19 mm)	1"	2.14"	9.05"	M6	M6 x 40 mm

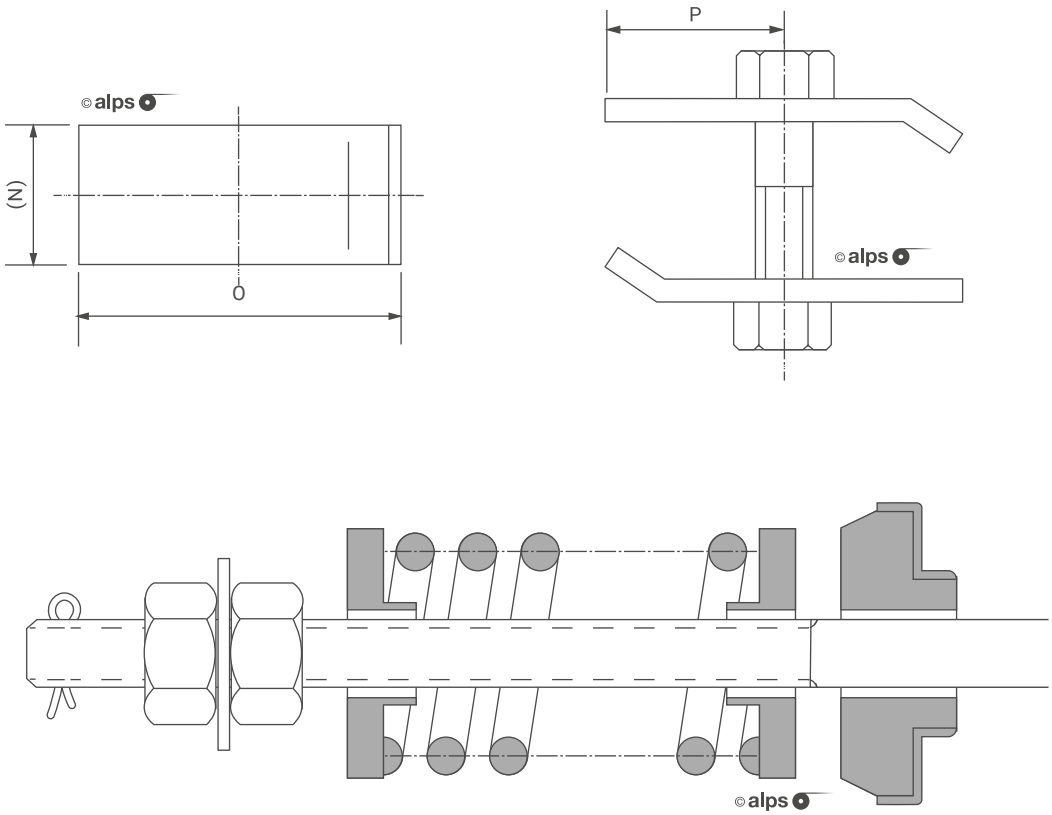

SPRING ISOLATION BUSHING ASSEMBLIES

Part No.	Size
EL ZZWS10	3/8" (10 mm)
EL ZZWS13	7/16" – 1/2" (11 – 13 mm)
EL ZZWS19	11/16" – 3/4" (17.5 – 19 mm)





# Reeving splices

REEVING SPLICE SPECIFICATIONS

Catalog Nr.	Wire Rope		Units		wt/lb	
	Size		Mean Diameter			
	in	mm	in	mm	Per Carton	
RS-2102	5/16	8	0.312	8.0	50	30
RS-2103	3/8	9	0.375	9.5	50	30
RS-2104	1/2	11	0.4375	11.0	50	30
RS-2105	1/2	12	0.500	12.7	10	8
RS-2106	9/16	14	0.5625	14.2	10	9
RS-2107	5/8	15	0.625	15.8	10	13
RS-2108	11/16	17	0.6875	17.4	10	17
RS-2109	3/4	19	0.750	19.0	10	18
RS-2110	13/16	20	0.8125	20.6	10	24
RS-2111	7/8	22	0.875	22.2	10	28
RS-2112	1	25	1.00	25.4	10	41

Reeving splices are an inexpensive, disposable device used in elevator repairs to aid passing married ropes over pulleys and sheaves.

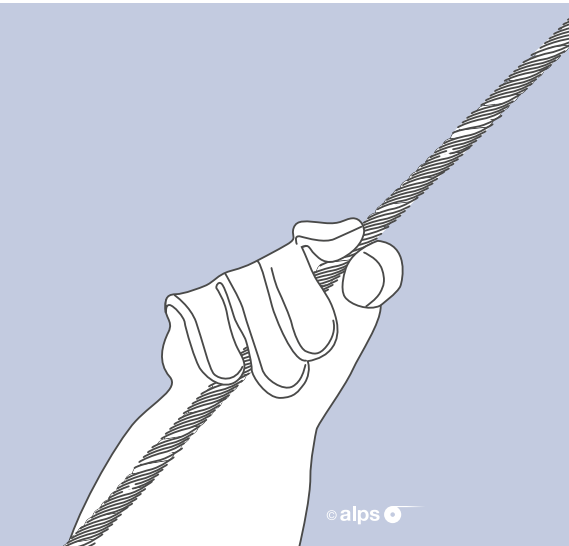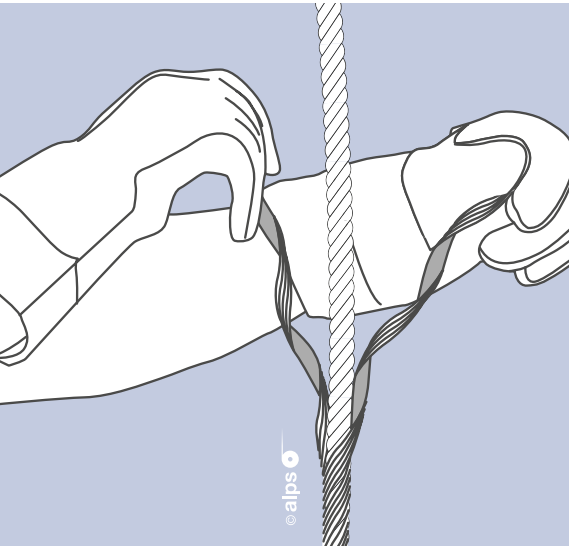

REEVING SPLICE SPECIFICATIONS

Catalog Nr.	Length		Number of subsets	Overall Diameter	
	in	mm		in	mm
RS-2102	19	483	3	0.415	10.54
RS-2103	22	558	3	0.477	12.11
RS-2104	25	635	4	0.539	13.71
RS-2105	29	736	3	0.640	16.25
RS-2106	32	812	4	0.702	17.83
RS-2107	36	914	3	0.797	20.24
RS-2108	40	1016	3	0.887	22.52
RS-2109	42	1066	3	0.950	24.13
RS-2110	46	1168	3	1.036	26.31
RS-2111	50	1270	3	1.113	28.27
RS-2112	56	1422	4	1.238	31.44

## Lubricant

### LUBRICATION AND RE-LUBRICATION

In ropes, there is friction between wires, strands and fiber cores. All these combinations need lubrication to assure an appropriate friction behavior and a good rope-lifetime. New ropes are lubricated during the production process. For high rise applications Alps ropes have a higher spec XS lube; other, less demanding applications use our standard lube (HS).


A long period of time between production and installation, as well as incorrect storage conditions, can lead to dry strands and cores.

- Upon installation, new ropes must be checked for sufficient lubrication
- If necessary, new ropes must be re-lubricated to assure rope function from the start of the operation and a long rope-lifetime!
- Periodically ropes in service must be re-lubricated

Re-lubrication is necessary to prevent rope damages from rouging and corrosion.

Elevator ropes shall be lubricated and re-lubricated at least once a year or every 250,000 starts. A simple and practical option is to touch the rope and then check the finger for lubricant. Important: Governor ropes are not lubricated during manufacturing and should not be lubricated in the field either.

Elevator ropes shall be lubricated and re-lubricated at least once a year or every 250,000 starts. A simple and practical option is to touch the rope and then check the finger for lubricant.

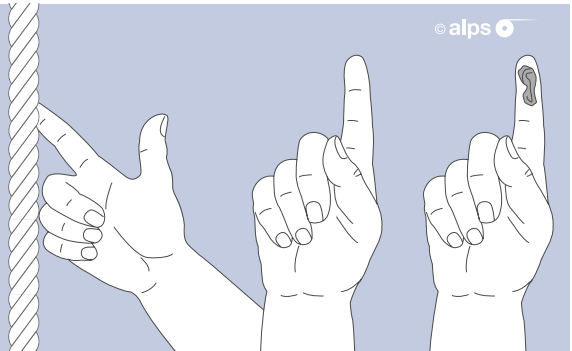


**Ropes should be lubricated the correct way:** Lubricant is pumped from a canister to a rope lubrication device. Equal and controlled distribution of lubricant to the ropes is ensured.

This type of lubrication does not need any action for a longer period of time. Brushes are mounted to each lubricant can. The can is under pressure and slowly presses the lubricant through the brushes to the ropes. The amount of lubricant can be set with the timer on the back side of each can. Timing can be chosen between 1 and 12 months. Automated rope lubrication is easy and safe.

Our product supports customers for problem-free rope lubrication and long service life span of the ropes.

**Ropes should not be lubricated in these ways:**

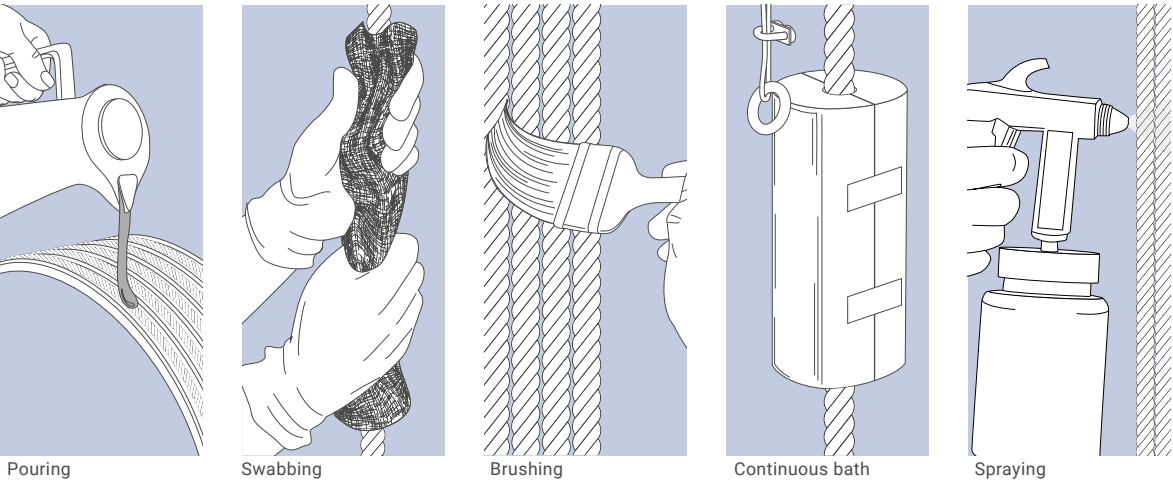

The amount of lubricant applied this way is out of control. Over-lubrication will lead to dangerous slippage and pollution of the machine room.

**LUBRICANT QUANTITY**

The amount needed for elevator ropes depends a lot on the installation and environment.


Influences, such as high elevator frequency, shaft temperature or draft from ventilation must be considered.

Lubricant should be compatible with the originally applied product by the manufacturer. Lubricant must be free of acids and alkalis. Lubricant should hold a high film strength and some anti-corrosion additives. The lubricant's viscosity should be capable of penetrating the interstices between wires under operating conditions. Intrusion of lubricant is supported due to capillarity within the rope parts. Lubricant should offer good adhesion with a friction coefficient of  $\mu$  0.09 [-] for the material pair steel/cast iron.


In high speed applications, attention should be paid to the amount of lubricant used. Alps ropes have a more strict spec to minimize lubricant spillage in high speed and high rise applications.

**Lubrication of elevator ropes is a demanding task:** Lubricant for elevator ropes should sufficiently lubricate between the rope parts such as wires, strands and rope core. At the same time, it should provide good adhesion between rope and sheave.

**AlpsLube 60™ supports all the lubrication requirements.**

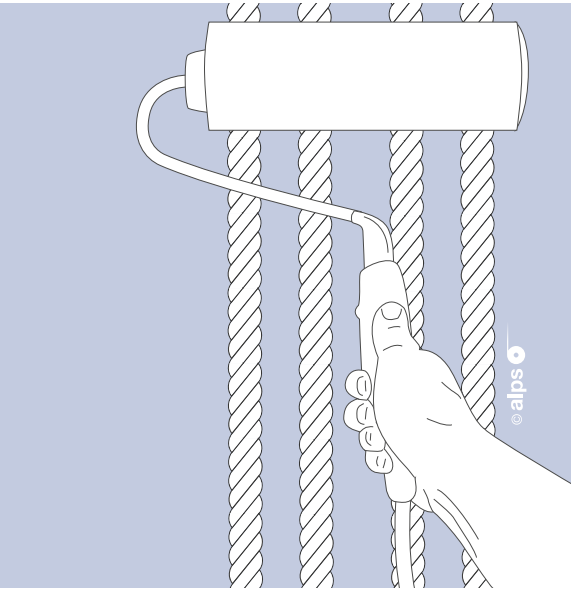

This chart is only a guideline to determine the amounts of **ounces** of lubricant **per** rope diameter and **100 ft** of rope length.

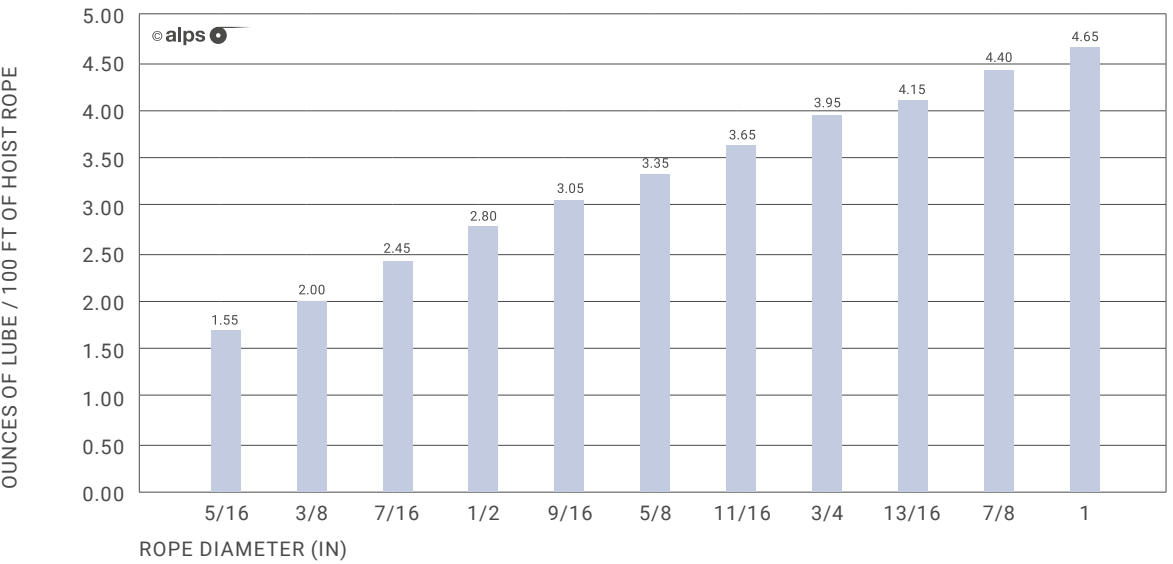



Product code key



Technical Information

Wire Rope

Low Rise Hoisting Ropes ..... 4

Mid Rise Hoisting Ropes ..... 14

High Rise Hoisting Ropes ..... 22

Governor & Door Ropes ..... 28

Additional Products ..... 37

Technical Information

**AlpsELEC** ..... 47  
Estimated Rope Life Calculation Software

**Elevator rope types** ..... 48  
Hoist Ropes, Door operating ropes, Governor ropes, Compensation ropes

**Hoist ropes and cores** ..... 49  
Fiber core ropes, Full steel ropes, Special full seel ropes

**Lay types** ..... 50  
Standard Lay type, Parallel Lay type

**Rope design** ..... 50  
Pre-formed ropes

**Strand constructions** ..... 52  
Seale, Warrington, Filler, Standard

**Lay length** ..... 54

**Design and calculation** ..... 54  
Circle-model, Ellipsis-model, Bent-ellipsis-model

**Sheave groove shapes** ..... 56  
Round groove, Round groove with undercut, V-groove, V-groove with undercut

**Production** ..... 57  
Rope wire, Rope core, Rope strands, Rope

**Pre-stretching** ..... 59

**End fittings** ..... 60  
Detachable fittings, Clamp fittings, Asymmetric wedge sockets, Symmetric wedge sockets, Undetachable fittings, Spelter sockets, Swaged sockets

**Rope discard criteria** ..... 64





# AlpsELEC

## ESTIMATED ROPE LIFE CALCULATION SOFTWARE


The **determination of the life expectancy** of an elevator rope system is a reasonably complex process due to diverse factors that affect such a system. AlpsELEC is a **computer program** designed to help the elevator professionals

**select the best rope** for any application and **determine the lifetime** of the wire rope. Based on many years of technical experience in the elevator market, **Alps developed a powerful tool available to all Alps rope users.**






# Elevator rope types




## HOIST ROPES

In **1:1 installations** hoist ropes are fixed on the top of the car and counterweight and run over the drive sheave.

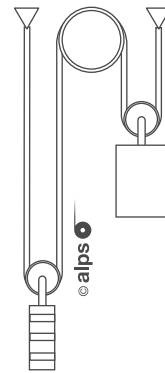

In **2:1 installations** hoist ropes are fixed on the top of the elevator shaft and run over pulleys fixed on the elevator and counterweight top.

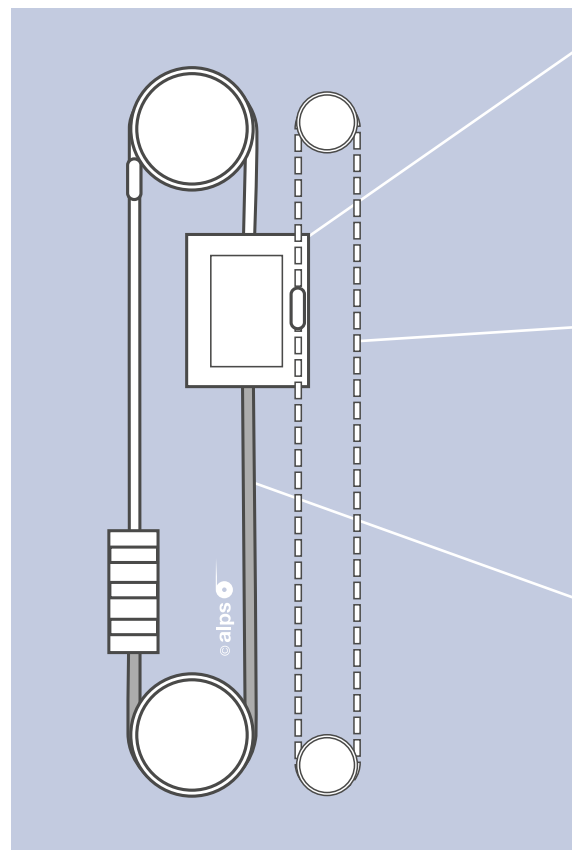

## DOOR OPERATING ROPES

Elevator doors on each floor and in the car are driven by a motor **moving the door operating ropes**.

## GOVERNOR ROPES

This type of rope initiates the **emergency brake** system in case of uncontrolled speed downwards. It is a safety part.

## COMPENSATING ROPES

In **higher installations** this type of rope compensates the weight of the hoist ropes and is fixed below cabin and **counterweight running over a deviation sheave** in the bottom of the elevator shaft.

# Hoist ropes and cores

The **center** of each stranded rope is called the **core**. This is made from **fiber or metal** wire. Combinations of the materials mentioned are also possible.

The core has a **supporting function**. It takes over all **pressure forces** directed against the center of the rope and prevents the strands from touching each other. Hoist ropes used for elevators are:

## FIBER CORE ROPES

### Hemp cores

- Natural fiber
- Unstable and soft
- Unsuitable for elevator ropes

### Poly Propylene (PP) cores

- Man-made fiber
- Stable, firm, precise
- Not heat resistant
- Not for elevator hoist ropes

### Sisal cores

- Natural fiber
- Stable and firm
- Heat resistant
- Best material for hoist fiber cores

Fiber core ropes can be used up to 80 m and 3 – 4 m/s.

## FULL STEEL ROPES 8 OR 9 OUTER STRANDS



### Steel core in form of a strand

- Can be used for max. 6 outer strands

### Independent wire rope core (IWRC)


- Can be used for 8 or more strands

IWRC ropes with 8 or 9 outer strands can be used up to 400 m and 5 – 8 m/s.




# Lay types

In elevators you find different types of rope.

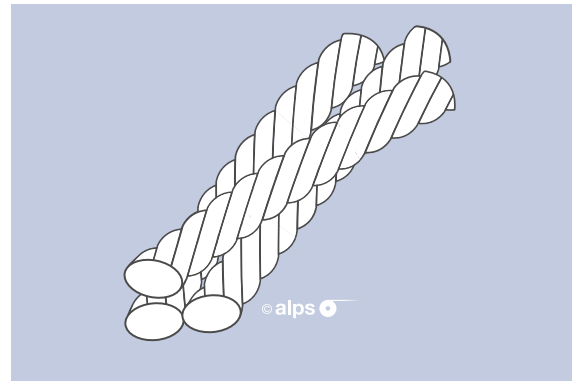

## STANDARD LAY

Strands lay on each other with **high point pressure**. Strands of all layers are in different directions and lay lengths. Each layer requires a separate production run. A **poor fill-factor** results in diameter-reduction, elongation and in a **short service life**.

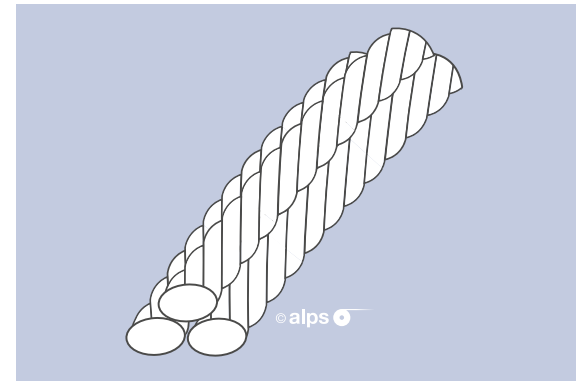

## PARALLEL LAY

Strands lay on each other with **low line pressure**. Strands of all layers are in the same directions and lay lengths. All layers can be produced in one operation run. A good fill-factor results in a little diameter-reduction, low elongation and in a long service life. **Parallel laid ropes** are more **sensitive to untwisting** than standard laid ropes.

**The use of parallel laid ropes is recommended for high rise installations.**

# Rope Design

## PRE-FORMED ROPES

When the ropes are **preformed**, the strands are individually brought into their final helical shape immediately before the stranding point.

This way strands **fit exactly** around the rope core. Ropes can be **cut without fixation** and strands remain in position. Also, **broken wires** do **not stick out of the rope** structure.


## GOVERNOR ROPES

They are **not friction driven**. Governor ropes are fixed to the cabin and run in a loop over the overspeed governor on top of the shaft, a deviation sheave in the basement of the shaft and back to the car. **These ropes are moving the Governor rope sheave**. They are not friction driven. Due to little friction, they can contain man made fiber cores, e.g.: Polypropylene (PP). **Governor ropes** stand out with a stable diameter and little elongation. For safety reasons only a small amount of lubricant is applied.

If the car descends **faster than it's designed** to, the **Governor rope is blocked**.

The blocked Governor rope initiates the brake system at the cabin. The brake-shoes clamp to the guide rail and the cabin comes to a stop.


In the US Governor ropes can be in **iron grade** (680 N/mm<sup>2</sup>). Diameters of Governor ropes are between **8 to 10, sometimes 12 mm**.

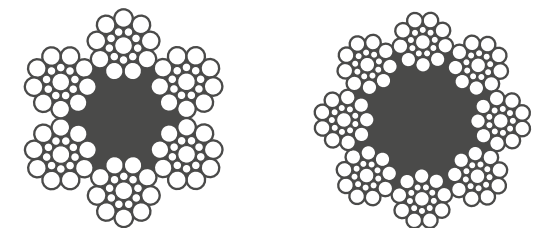

## COMPENSATION ROPES

Drive sheaves need power and friction to move the weights of the car, passengers, hoist ropes and travelling cables. **Compensating ropes balance** the hoist rope weight. In addition, they reduce extreme sheave and rope wear, **increase the system performance** and riding comfort, and increase **hoist rope** and **sheave lifetime**. Using the same rope type for hoist and compensating ropes can avoid a rope mix-up in the field.



Single large diameter ropes or coated guided chains can be used to compensate hoist rope weights. The **use** of coated chains **is limited** to approx. **500 ft (150 m)** installation height and **690 ft / min (3.5 m / s)**.

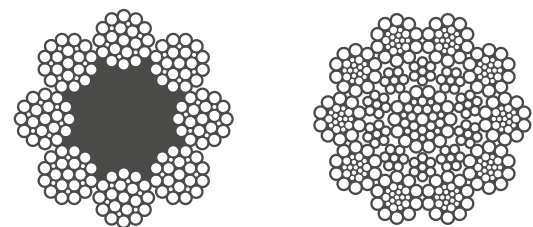

## DOOR OPERATING ROPES

Door operating ropes are installed around two **small diameter pulleys** of which one is driven by a motor. The ropes are **fixed** to components moving the doors.

Ropes used for this high demanding operation are in a range of **1 / 8" (3.2 mm) to 3 / 16" (4.8 mm)**. Constructions are **7x19 Seale** with zinc coated wires of **1960 N/mm<sup>2</sup>**.

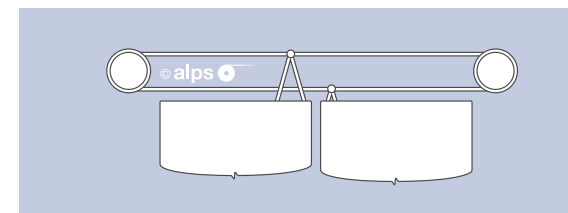



# Strand constructions


The **more wires** a construction has, the **more flexible** it is. **Thick outer wires** are suitable for exposure to **abrasion** or high transverse

## SEALE

**Seale** is one of the **most used** strand constructions for elevators. In 1885 Thomas Seale received a patent in the USA for this design. The **number of wires** is the same in **every layer**. Therefore, the wire diameter must be larger from layer to layer. Friction driven installations require large outer wires. **Crossing of wires is avoided** because all outer wires are

pressure; **thin outer wires** are more suitable for high numbers of **bends**.

placed in the grooves of the previous layer. This results in **linear contacts** between all wires. The **parallel** laid wires in the strands **provide** a very good filling factor and a **high breaking load**. Seale constructions should be used **up to** a diameter of **1/2"** (12.7 mm). If used for larger diameters the outer wire diameters are too large to provide good rope bending behavior.

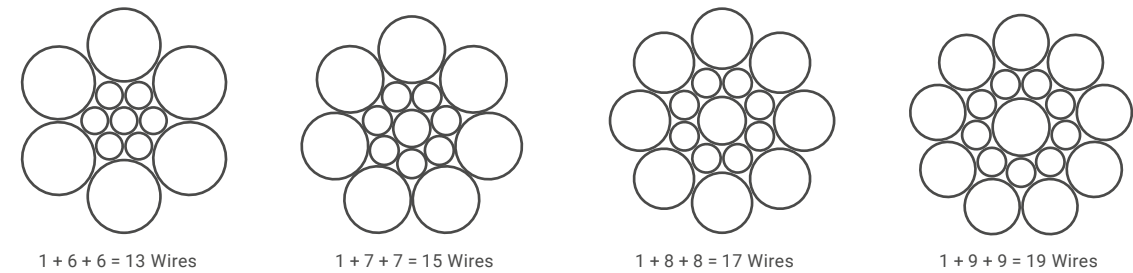


## WARRINGTON

The wires of the **first layer** have the **same diameter**. There is a wire in each of the grooves in the first layer. Smaller diameter wires lie between these wires. The **contact** of all wires **are linear**.

The outer wires of this construction are smaller than in the Seale construction of the same diameter. **Warrington** strands have a very **good filling factor**.


It is recommended to use this type of elevator rope for rope diameters **larger** than of **1/2"** (12.7 mm).

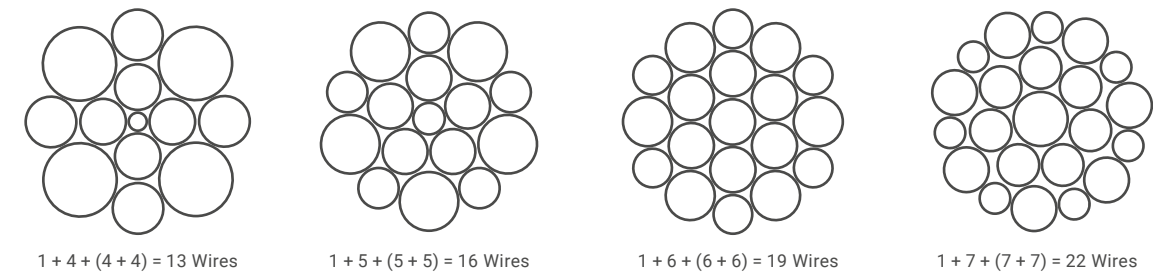

## FILLER

At least **three wire layers** have three **different** wire diameters, but the **same diameter** for each **wire layer**. The number of wires in the first layer and the filler layer is the same, that of the outer layer is twice as large. The **contact** of all wires **are linear**. In various countries, the cored wire is not taken into account in cross-section calculations.

**Space** between the inner and outer wire layer are **filled** with **small diameter wires**. This is what gives the construction its name. With the strand construction of **21 wires**, the outer wires are smaller than in Seale or Warrington constructions of the same diameter. Ropes with **filler strands** have a good **bending behavior**. They are very suitable for **large rope diameters**. Due to the small filler wire diameter, filler constructions are not recommended for small diameter ropes.

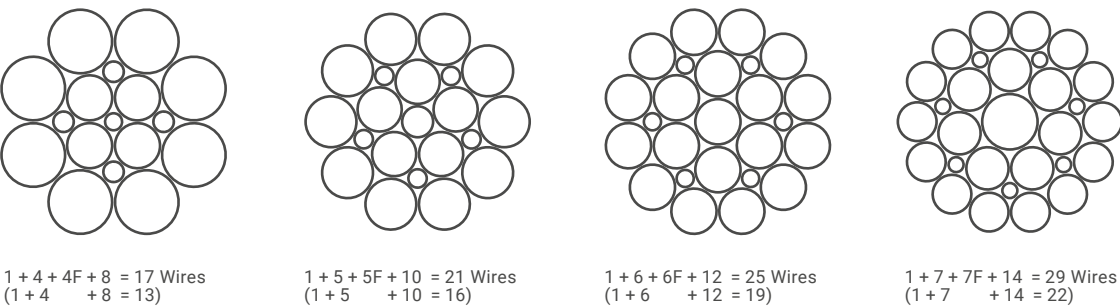


**All above mentioned strands can be produced in a single production run. Due to parallel laid wires, there is line contact between all wires. This results in a good lifetime span.**

## STANDARD

Except for the core wire, all wires have the **same diameter**. The number of wires **increases** by six with each additional layer. The wires of all layers **cross** the underlying layers at an acute angle. This leads to **point contacts**.


Therefore, the **life span** of ropes with standard laid strands is **shorter** than Seale, Warrington or Filler. Each wire layer requires an extra production run.

Ropes with standard strand constructions are **rarely used for elevators**.

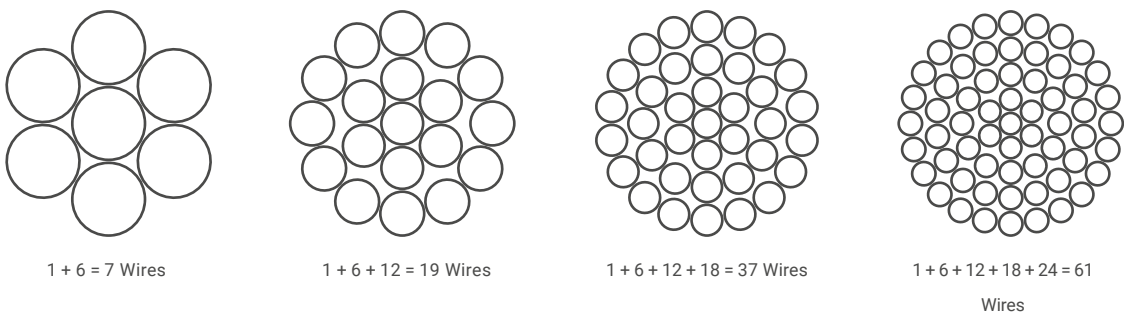

# Lay length

The lay length is **one rotation** of the wire **around** the strand **center** or the strand around the rope center. **Wire** and **strand diameter** are in direct relation with strand or rope **lay lengths**.

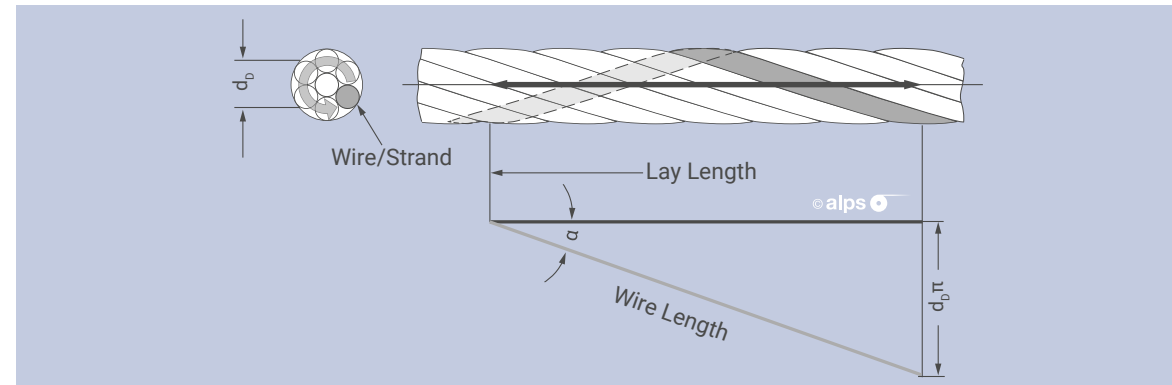

**None** of these rope **parameters** can be changed **separately** as you can see in the design pictures next page.

## Design and calculation

By design we understand the exact geometric definition of wires, strands and ropes. The **later use** of the rope **dictates the limits** of the design choice.



It is a great advantage for users if the rope designer knows the **conditions of use** as precisely as possible. This knowledge makes it easier to determine the **optimal rope type**, which can be expected to have trouble-free operation and a long service life. Thanks to the use of a **computer**, the necessary **geometric calculations** can be carried out **precisely**.

The **adjacent strands** / ropes are optimized and have the **same diameter**.

If the **lay length is changed**, while the construction remains the same, it is necessary to **adapt the wire / strand diameter**.


If the **lay length is changed**, wire / strand **diameters** must be adjusted.

If wire / **strand diameters** are changed, the **lay lengths** must be adjusted.

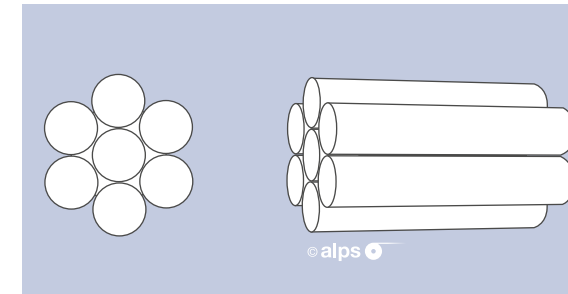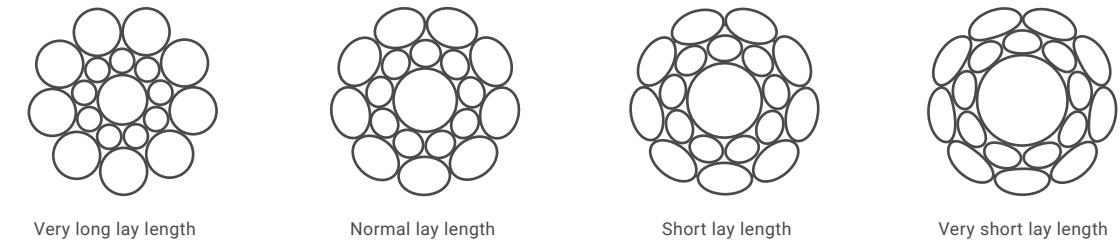


### CIRCLE-MODEL

If **seven identical** cylinders are placed next to each other as in the arrangement shown, the simplest model of a strand / rope construction is created. It can be seen that all neighboring cylinders are in **contact** and that the **cross sections** are **circular** in shape.

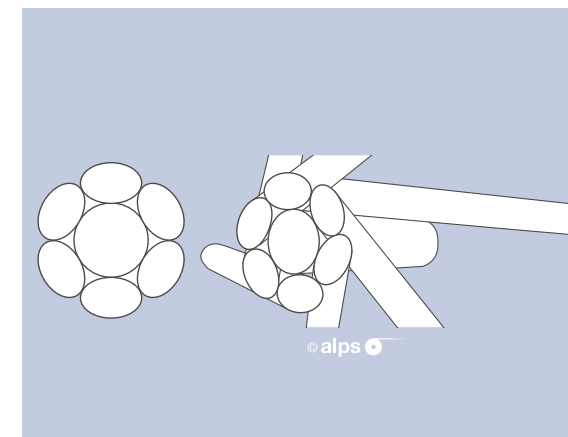

### ELLIPSIS-MODEL

If **six identical** cylinders are placed at an angle on a vertical one, **elliptical cross sections** result from the **inclined cylinders**. It can be seen that the cylinders require more circumferential space in an inclined position than in a vertical position. If the **middle** one is to touch the inclined cylinders, it must be **larger** in diameter. The **ellipse model** only approximates reality, although it is **more precise** than the **circle-model**. It is still widely used as a basis for calculations.

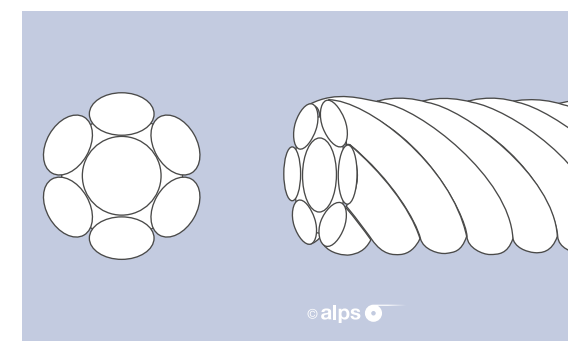

### BENT-ELLIPSIS-MODEL

If **six identical** rods are bent around a cylinder, this **creates cross sections** in curved elliptical shapes. Since this model **corresponds to reality**, today's computer programs are based on this basis. The more precisely the calculation agrees with reality, the higher the quality of the basis for the construction.




# Sheave groove shapes

There are four groove shapes in traction sheaves:

## ROUND GROOVE

**Round groove with undercut (also known as semicircular groove)**


The round groove offers the worst power transmission of all the groove types.



## ROUND GROOVE WITH UNDERCUT


**Round groove with undercut (also known as seat groove)**

If a rectangular groove is pierced under the round or rope groove, it is referred to as an undercut. The round groove with undercut is the most common groove shape.




## V-GROOVE

With the **V-groove** there is enormous transverse pressure on the rope cross-section, which is why the V-groove places the greatest strain on the rope.



## V-GROOVE WITH UNDERCUT


However, the **V-groove** offers the greatest driving ability but the shortest rope life span.



Depending on the **groove shape** used, the rope is **guided well** (round groove) or **pressed** into the groove (wedge groove). The guidance and the pressure are two factors that have a significant influence on the one hand the **traction capability** and on the other hand the **service life**.

The **stronger the undercut**, the **greater** the contact **pressure** and the greater the wear on the rope and the rope groove. The **undercut angle**, which is designated with an angle between the rope center point and the two transition points from the groove, is between a minimum of **70°** and a maximum of **105°**.

## Groove profiles and impact on rope service life

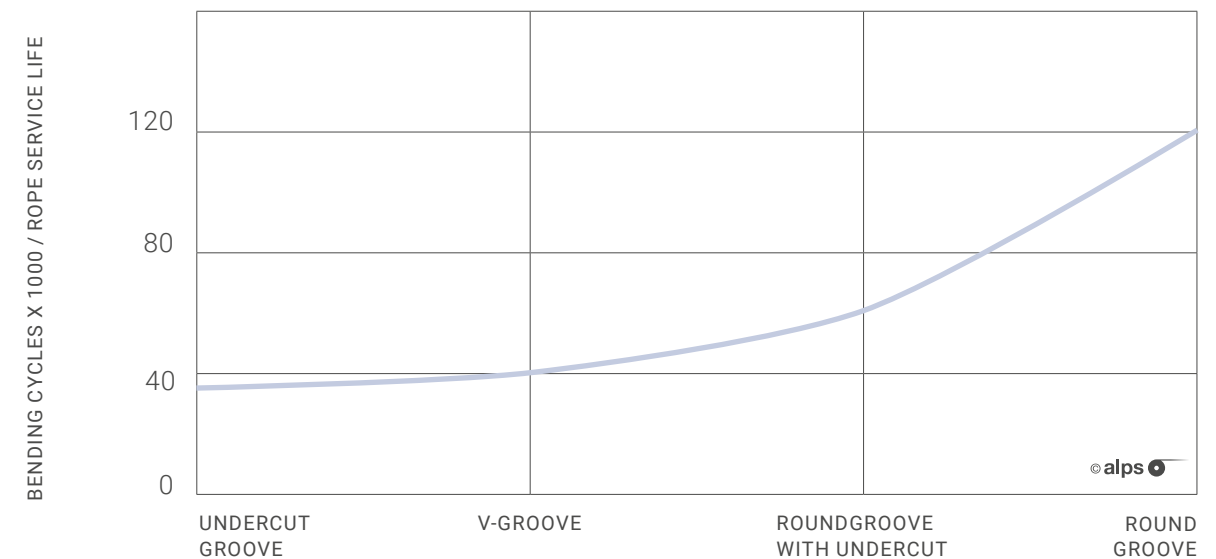

# Production

## ROPE WIRE

The **raw material** for the wire production is **wire rod**. It is drawn to the required dimensions through drawing dies with graduated diameters. This process results in an increase in material strength and hardness. The required

**final strength** is achieved through suitable measures, for example, **heat treatment** (patenting), number of drawing stages, etc. If necessary, rope wires are **galvanized** before or after the last drawing process.

## ROPE CORE

**Yarns** made from synthetic or natural **fibers** are processed into strands, which are used individually as cores. Cores for **thicker ropes** consist of **several strands**. Production takes

place in one operation on modern systems. If necessary, **yarns** should be impregnated with **lubricant** before processing. Inlays made of metal wires are strands or ropes.

ROPE STRANDS

**Wires** for elevator rope strands are between **0.1 mm** and **1.5 mm** in diameter. Delivery takes place in coils or on spools. Rope wire can be supplied directly on **machine spools**. This eliminates the need to rewind and cut to the required wire lengths.


The number of wire spools required for the strand construction are inserted into the stranding machine.

The **stranding machine** consists of a **rotating part**, one or two capstans and the winding device.

The reels **1** are connected to the capstan **2** by a gear unit. The lay length is selected with the appropriate gear setting. The capstans pull the wires out of the rotor through hole-plate, die and post-forming device. The hole-plate arranges the different wire diameters according to the construction and they are brought together in the die.

If necessary, the **lubricant** is applied after the hole-plate. **Only at this point** it is possible to apply a **film of lubricant** to each wire.

In the post-forming device, the strand is given the shape it needs for further processing. The suitable stranding machine spool **3** takes up the finished strand.

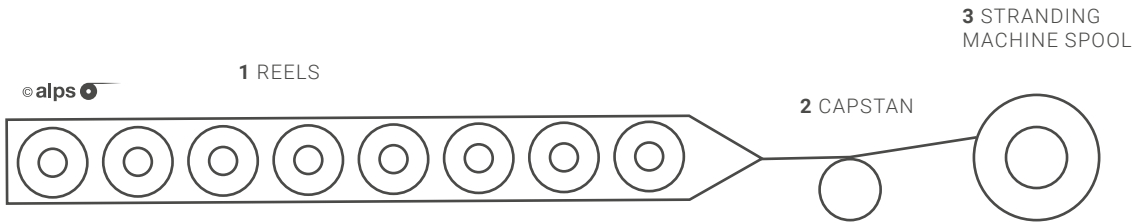

ROPE

The **roping machine** is basically the **same** as the **stranding machine**. The difference lies in the smaller number and the larger capacity of the reels.

The capstan **2** pulls the strands through the preforming devices, giving them their final helical shape. They are brought together with the core inside the die. The rope receives its final shape in the post-forming device and is wound directly onto the master reel **3** after passing the capstan **2**.

Pre-stretching

Alps recommends pre-stretched ropes particularly in high rise buildings. The constructional (permanent) elongation in elevator hoist ropes might require frequent adjustments which are costly and inefficient. Alps pre-stretching reducing or eliminating the need for shortenings after rope installation.

**All Alps elevator ropes come pre-stretched and tested at no additional cost.**

The following table shows elongation data obtained at Alps testing lab.

ELONGATION TABLE

Name	Construction	CONSTRUCTIVE ELONGATION AFTER 10% MBL	ELASTIC ELONGATION	TOTAL ELONGATION
			BETWEEN 2% AND 10% MBL	UNDER 10% MBL
Alps6 1S – EF	6x19 S – FC	0.18%	0.23%	0.41%
Alps6 2F – TF	6x25 Fi – FC			
Alps6 2F – EF	6x25 Fi – FC	0.27%	0.23%	0.50%
AlpsXTRA8 1S – TF	8x19 S – FC			
AlpsXTRA8 1S – EF	8x19 S – FC	0.22%	0.20%	0.42%
AlpsXTRA8 2F – IF	8x25 Fi – FC			






# End fittings

There are detachable (reusable) and non-detachable (one time use) end fittings for ropes.


Wedge sockets are also known as shackles.

## DETACHABLE FITTINGS

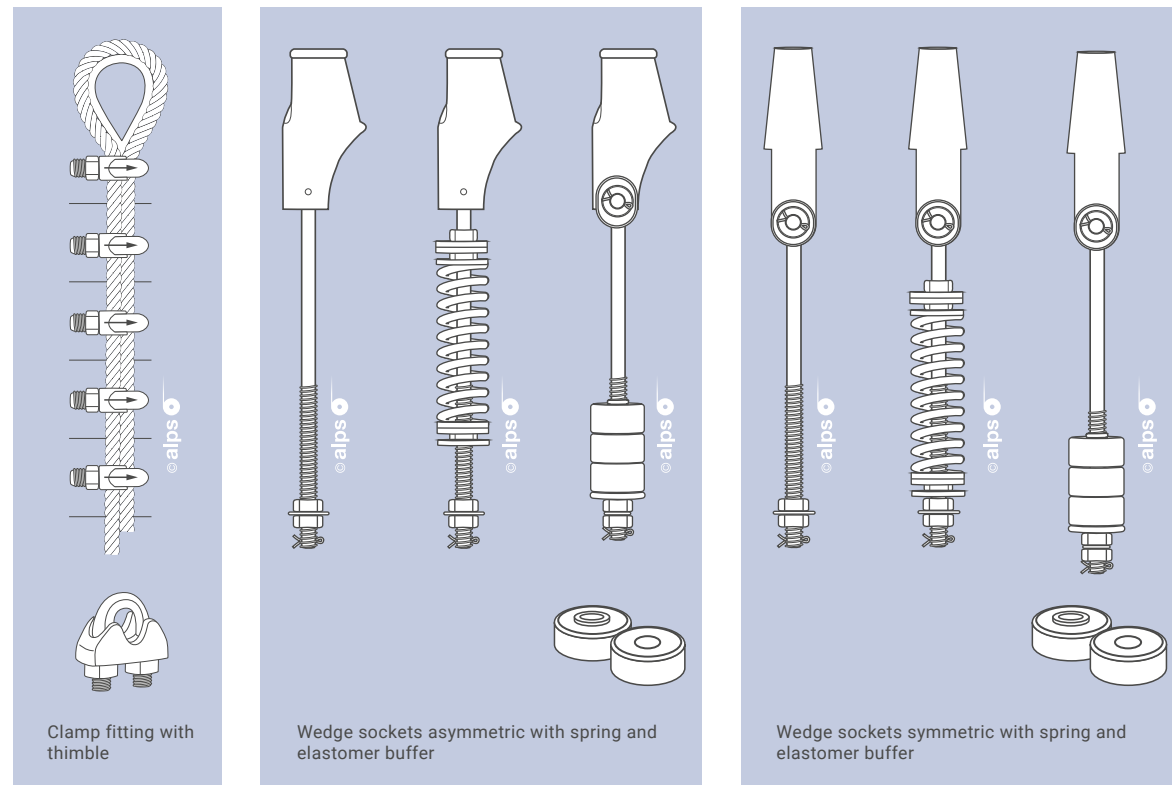

## CLAMP FITTINGS

The **bow-part** of the **clamp** always has to be placed on the rope **dead-end**. The load on the dead-end is **max. 50%** of the rope load. The flat part of the clamp imbeds the higher loaded parts of the rope. It is recommended to use **5 clamps** for a higher rope load. Elevator ropes have a high safety factor and therefore only a **max. load of approx. 10%** of the possible rope load. Fixing clamp fittings of elevator ropes with 3 clamps is sufficient. The **distance** between clamps is about **5 to 10 times** the rope **diameter**.

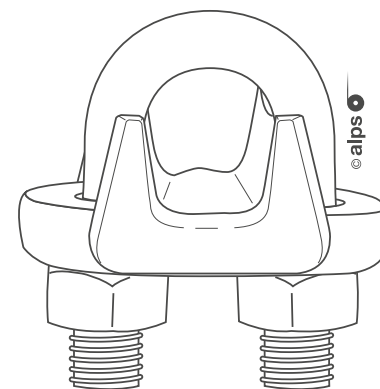



## ASYMMETRIC WEDGE SOCKETS

This type is very common in the US. The rope force goes in a **centric line** from the **rope** to the **fitting** and to the **final fixation** of the rope. The fixation is centric, even if it's called asymmetric.

The dead end is retained with **clamps** or with clips as shown in the picture. The **wedge** is being held back from falling out by these fixations in case of a loose rope situation. The dead end of the rope must come out on the asymmetric side of the wedge socket. **Incorrect** mounted wedge sockets lead to **rope damage**.

For clips the distance **y** is between **4" – 6"** (100 – 150 mm). For clips and clamps **x** is **0.75 times** the length of the wedge.

Below are some possibilities of how to retain the dead end with a clamp.

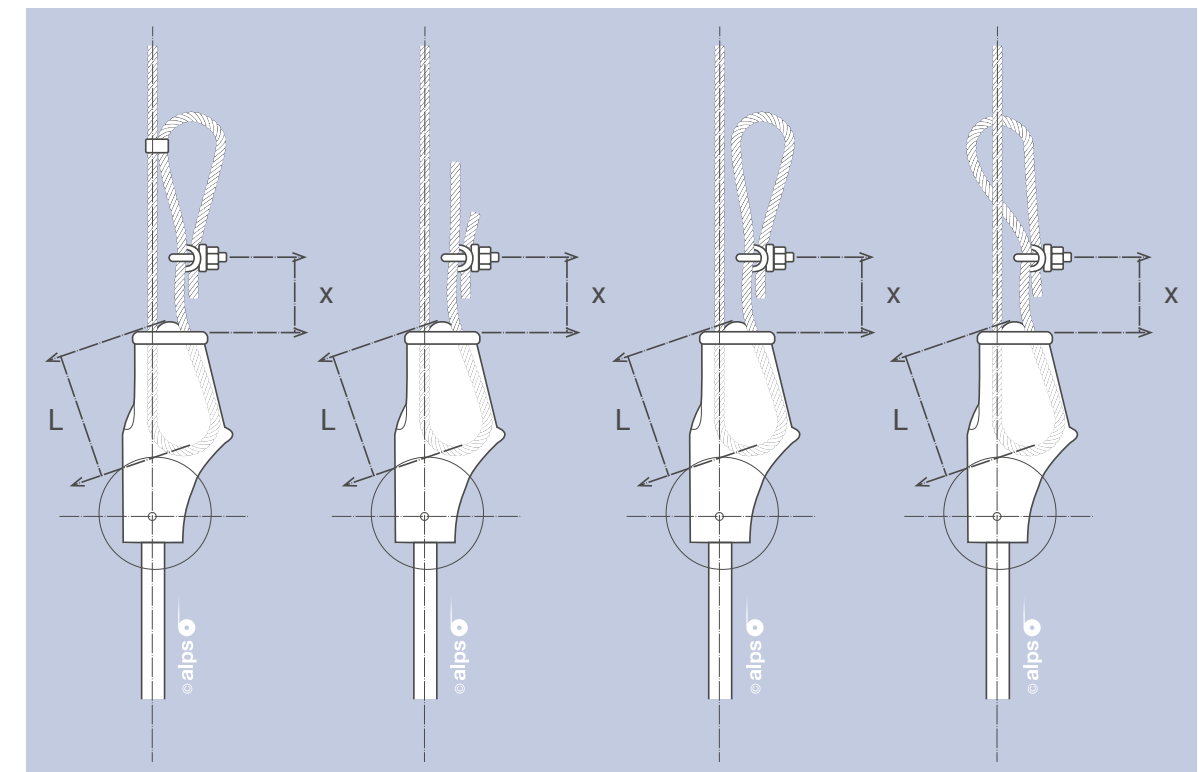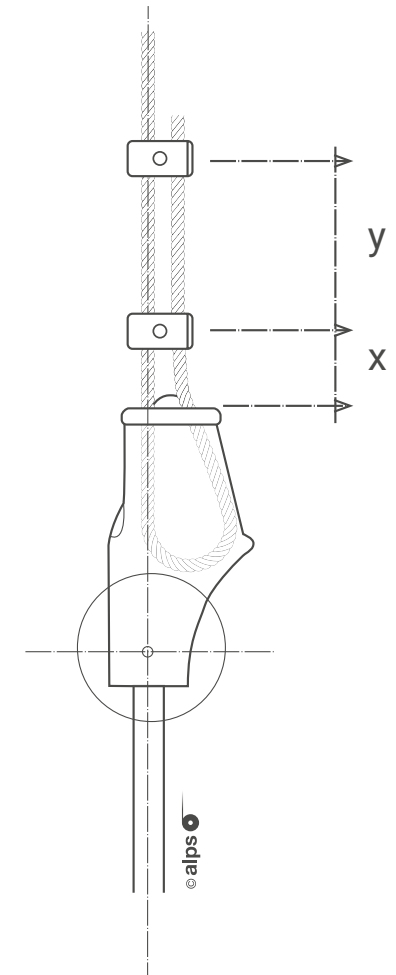


## SYMMETRIC WEDGE


This type of shackle is popular in Europe and Asia. A **small eccentricity** between the rope and the fitting **does not reduce safety** or capacity of the **asymmetric wedge socket**.

The first clamp or clip should be fixed from the shackle at a distance of **0.75 L** (lengths of the wedge).

Other recommendations are similar to the asymmetric wedge socket.

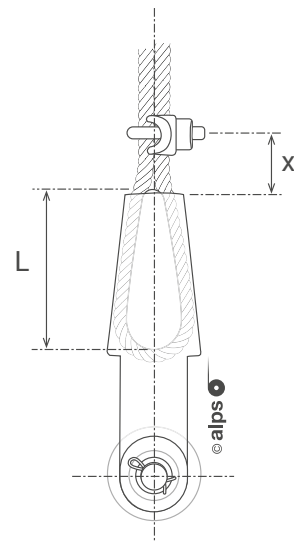

## UNDETACHABLE FITTINGS

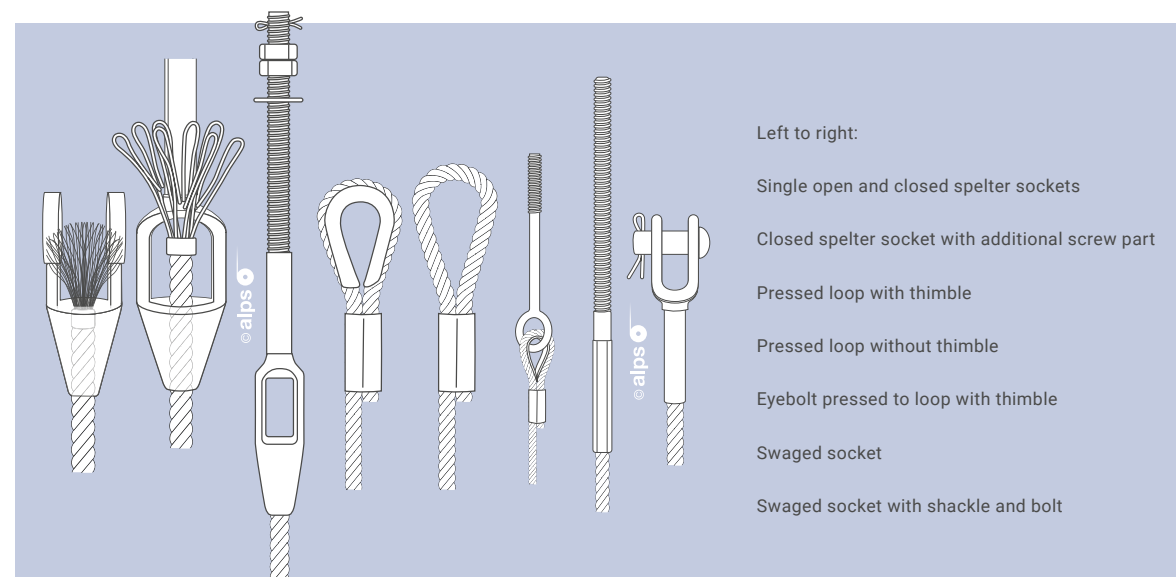


## SPELTER SOCKETS

The rope end is formed into a **broom** and pulled into the socket, which then is **filled** with metal or resin **socketing material**.

Before this process the rope and socket must be in a **vertical line**. Otherwise, highly tense and loose strands will be near the socket, resulting in an early rope damage in this area.

The pouring process must be done slowly to avoid bubbles inside the poured metal or resin.

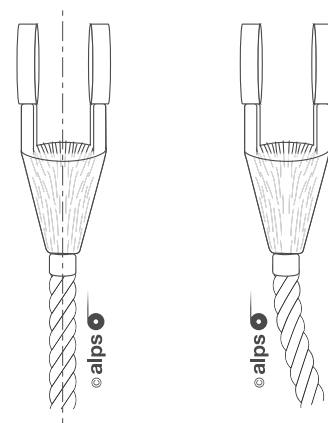


## SWAGED SOCKETS

**Swaged sockets** are mounted to **one end** of the hoist rope before **delivery to the site**. Expensive and demanding installation work is done in the plant. **Only one end** must be equipped with a **detachable** end fitting to pull the rope into the elevator installation. The

ropes can be installed **easy and quick**, without the need of special tools.

A **control hole** allows to check the rope end position at all times. A **torsion lock hole** is applied near the end of the socket.

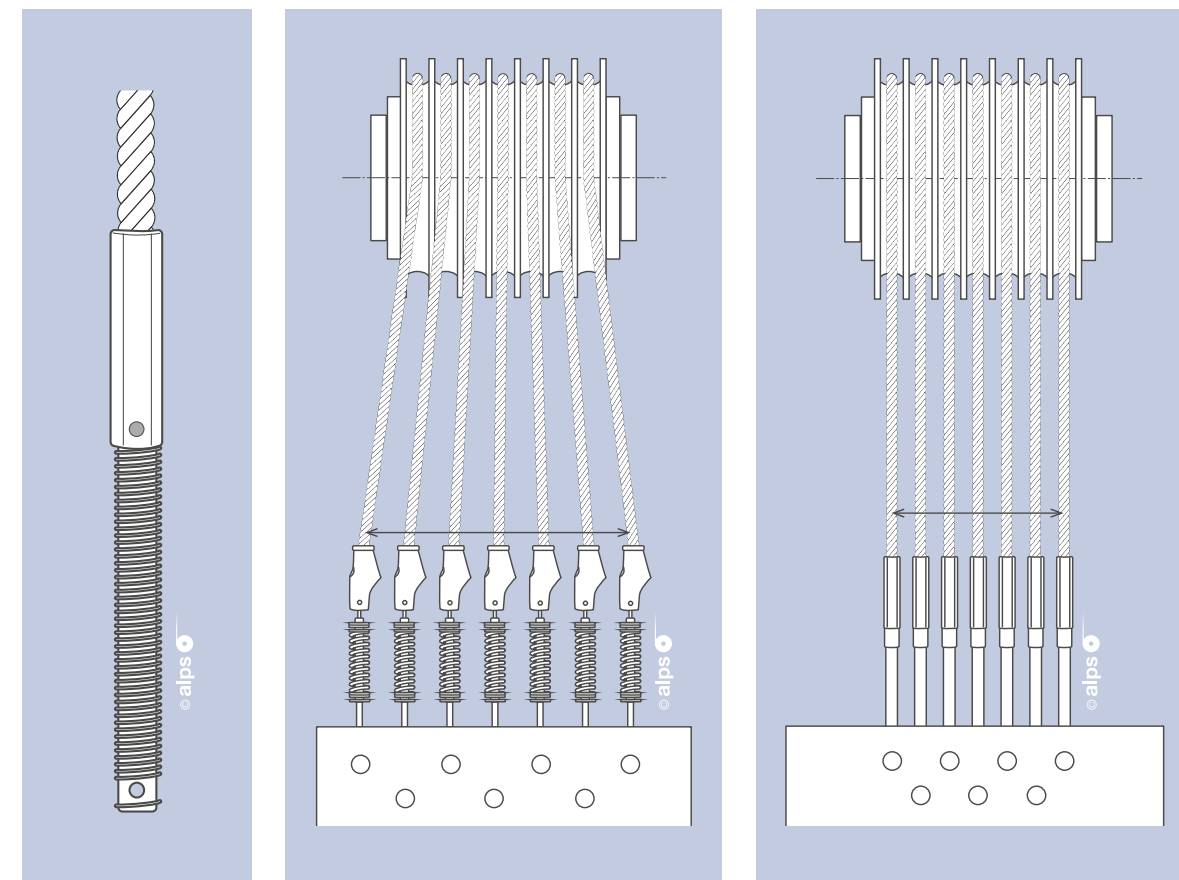

This type of end-fitting is applicable for all types of ropes. It is used in the **aircraft industry** for decades. Compared with the wedge socket, little space is needed for this fitting. That is important when the **cabin** arrives on the **top floor**.

Using **wedge sockets**, the ropes will enter the **sheave** in an angle and generate strong **friction** to ropes and sheave. This will always be on the same part of the rope length and result in a **short lifetime** of these rope parts as well as the sheave.

With **swaged sockets** there is no extra space needed. The whole rope set can run **parallel**, matching the **sheave groove distances** much better. Using swaged sockets, the **life span** of ropes and sheaves will be **much longer**.



# Rope discard criteria

The discard of alps elevator ropes must always be according to ISO-4344 or other international standards.

Elevator ropes are complicated machine parts and are subject to a large number of outer influences such as:

Stress / Friction / Bending / Torsion / Temperature / Corrosion / Pressure / Dust / Humidity / Vibration - etc.

Additional influences to consider are:  
Travel frequency / Maintenance / Lubrication / Equal tension / Installation condition - etc.

Discard criteria can be divided into 2 groups:

- Measurable discard criteria (defined by quantities in standards)
- Non-measurable discard criteria (to be judged by the expert).


Measurable discard criteria are:

- Outer wire breaks
- Diameter reduction

Measurable discard criteria are specified in national, international and company standards. Make sure you use valid standards, wherever ropes are installed.

Diameter reduction:

According to ISO-4344 Annex E:  
"Replacement should be considered if the diameter is reduced by **6% of the nominal rope diameter.**"

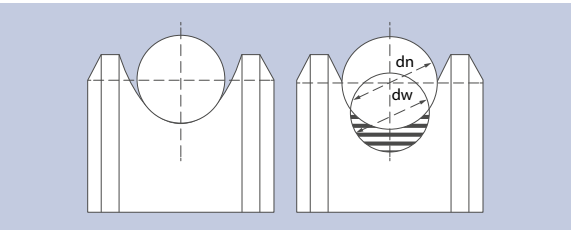

e.g.:  
Ø 1/2" (12.7mm) – min. Ø 0.471" (11,9 mm)  
Ø 1/4 "(6.35mm) – min. Ø 0.235" (5.96 mm)

In addition, ISO-4344 says:

"If unusual features are evident that might indicate the possibility of advanced internal deterioration, replacement of the ropes should be considered. EXAMPLE: **local reduction in diameter.**"

Non-measurable discard criteria are:

- Corrosion
- Mechanical damage
- Rope deformation
- Excessive wear etc.

The discard criteria must be assessed by an expert.

## OUTER WIRE BREAKS

ACCORDING TO ISO-4344 ANNEX E	IMMEDIATE DISCARD			DISCARD OR RE-EXAMINATION WITHIN A CERTAIN INTERVAL FIXED BY AN EXPERT		
ROPE CLASS	6X19	8X19	10X19	6X19	8X19	10X19
AVERAGE NUMBER PER LAY LENGTH	> 24	> 30	> 34	> 12	> 15	> 17
PREDOMINANT NUMBER IN ONE OR TWO STRANDS PER LAY LENGTH	> 8	> 10	> 11	> 6	> 8	> 9
ADJACENT NUMBER IN ONE STRAND	> 4	> 4	> 6	4	4	6
VALLEY BREAKS PER LAY LENGTH	> 1	> 1	> 1	1	1	1



Corrosion:

Red paste or red metal parts between the strands are corrosion. Potential causes include:

- Insufficient lubrication
- Humidity and/or water penetration

Action needed:

- Analyze the red paste, metal parts and wires

If wires have a rough surface and show pitting:

- Replace the rope set

If wires have a smooth surface and no pitting:

- Clean rope from red paste/parts, re-lubricate and reduce inspection interval (observe!)

If the wire surface is rough, there might be serious corrosion.



Rouging:


Rouge is a fine, iron oxide formed on the rope during operation due to fretting (abrasion). It gives the rope appearance of rustiness. The presence of rouge does not mean that wire rope is beginning to rust.

Causes:


- Insufficient lubrication
- Friction between strands (rope diameter reduction)

The presence of rouge reduces the lift of the rope. However, If the wire surface is smooth there is no serious corrosion.

# Product code key

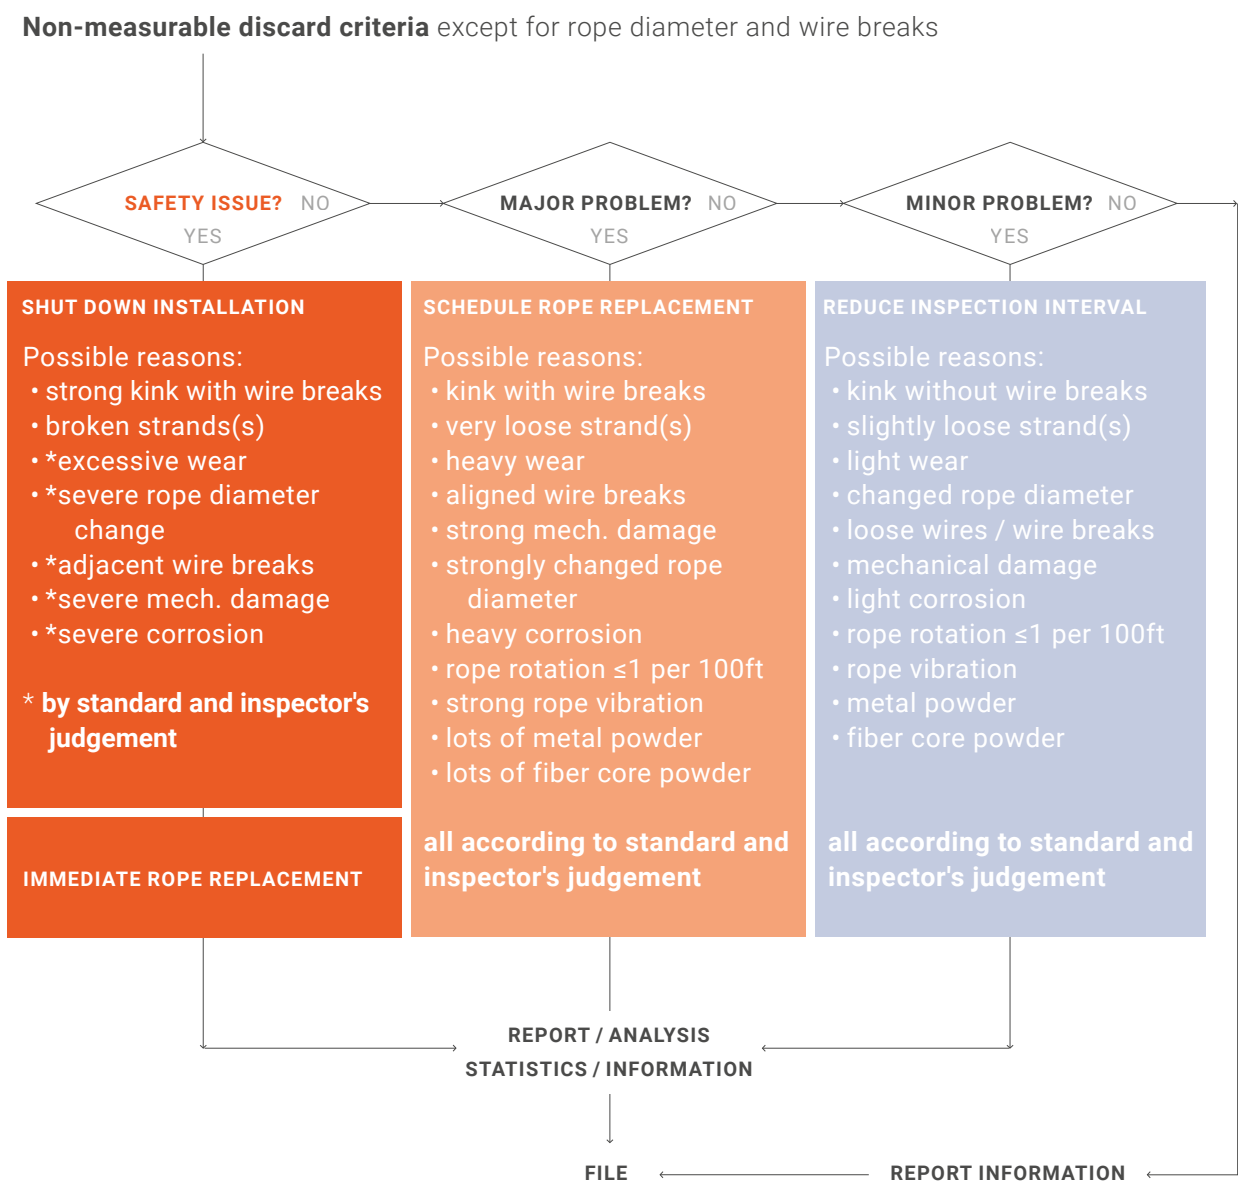

If only the damaged rope is replaced, the new rope will be larger in diameter and will carry more load. It will be under higher tension. Always replace the whole rope set.

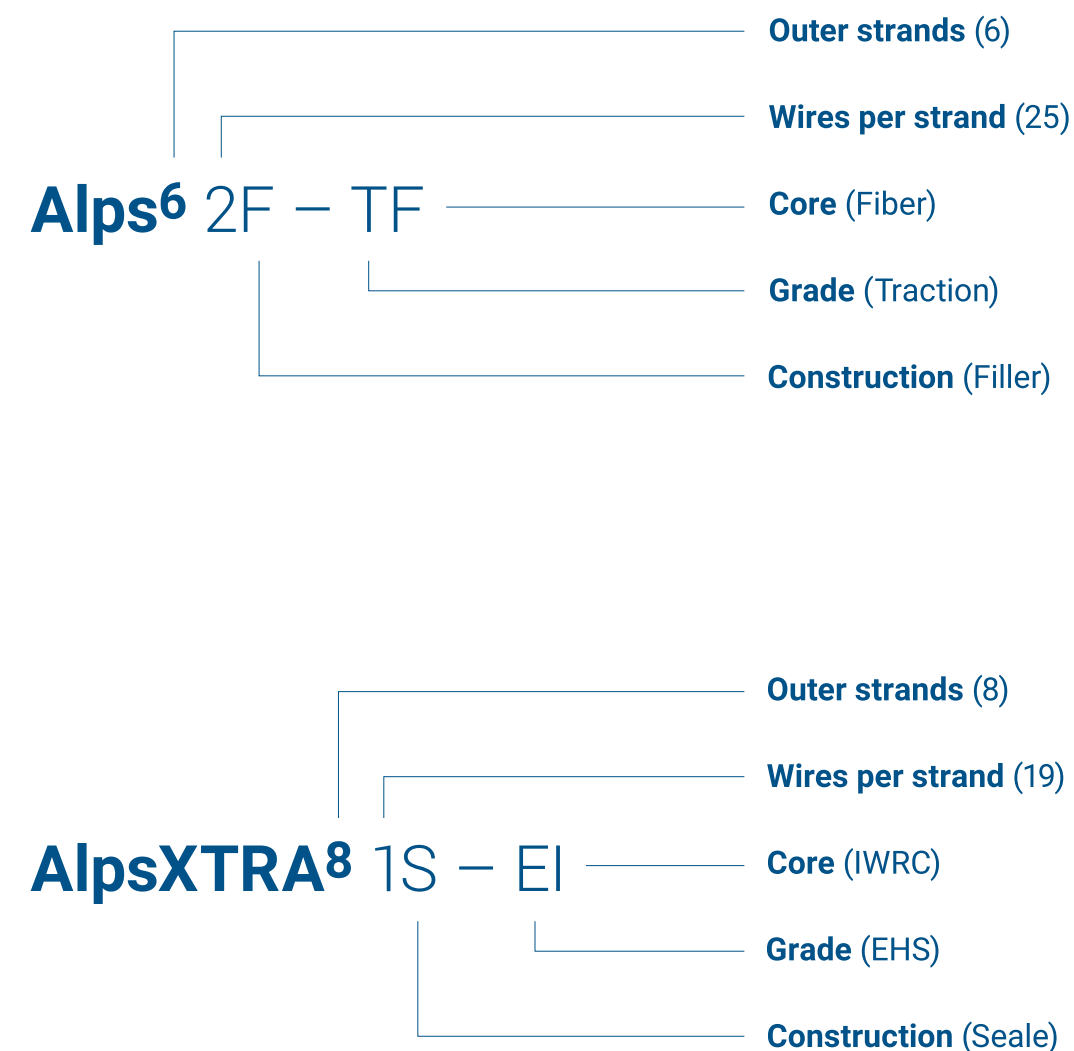





#### **CUSTOMER SERVICE**

Phone: (630) 893-3888

[alpswirerope.com](http://alpswirerope.com)

---

#### **MIDWEST - Chicago**

2530 Production Drive  
Saint Charles, IL 60174  
Phone: (630) 893-3888

#### **SOUTH - Houston**

5714 Delany Road, Suite B  
Hitchcock, TX 77563  
Phone: (713) 941-2068

#### **EAST - Harrisburg**

1549 Bobali Drive, Suite C  
Harrisburg, PA 17104  
Phone: (717) 943-1935

**verope** 

 **Kiswire**

Alps® is a joint venture of verope AG and Kiswire Ltd.

#### **EDITION 02**

All rights reserved. Copyright Alps® Wire Rope Corporation.  
Reprint or reproduction of any material in part or in whole only  
with express written consent of the publisher.

Printed on environmentally friendly FSC® paper.